

The beauty & brains for your home.

| duo
tecno
domotica



Automatisation and home automation have become an integral part of our lives. Their positive impact on our living comfort and work efficiency is enormous. For those seeking more than just functionality, Duotecno's powerful, aesthetic, and versatile home automation solutions cater to every need, whether at home or in the office.

For over 20 years, we have put our heart and soul into developing, designing, and manufacturing our home automation systems. Our passion and expertise in the field result in top-quality products and service. Our products, handmade in Belgium, are designed to deliver the look and feel you're looking for.

Burt Eeckhout & Peter Gitsels

About Duotecno



BACKWARD COMPATIBLE

New versions of Duotecno software and hardware remain compatible with older versions within the Duotecno system. In practical terms, this means that expansions can be easily implemented over time without having to overhaul the entire installation. Even older installations can effortlessly be given a new lease on life.

Our experts continue to refine our systems and quickly introduce new features and technologies. This **forward-looking flexibility** makes Duotecno not a static system, but a **living ecosystem** fully adaptable to your needs.




SERVICE & FLEXIBILITY

No matter what your project is, we're here to provide **advice and support**. Our software engineers are happy to answer all your questions over the phone. **Site and project follow-up** are also among the options available. Our sales professionals are happy to visit your location to ensure a **smooth follow-up process**. In addition, our service technicians are happy to roll up their sleeves to assist the installer.



100% RELIABLE BELGIAN

With over 20 years of experience, Duotecno is a market leader in its sector and stands out by offering its customers a direct 5-year **warranty**, which is unique in the market. Our home automation systems operate quickly and reliably thanks to the **CAN bus** protocol. All our products are **handmade in Belgium** and are developed and manufactured in-house

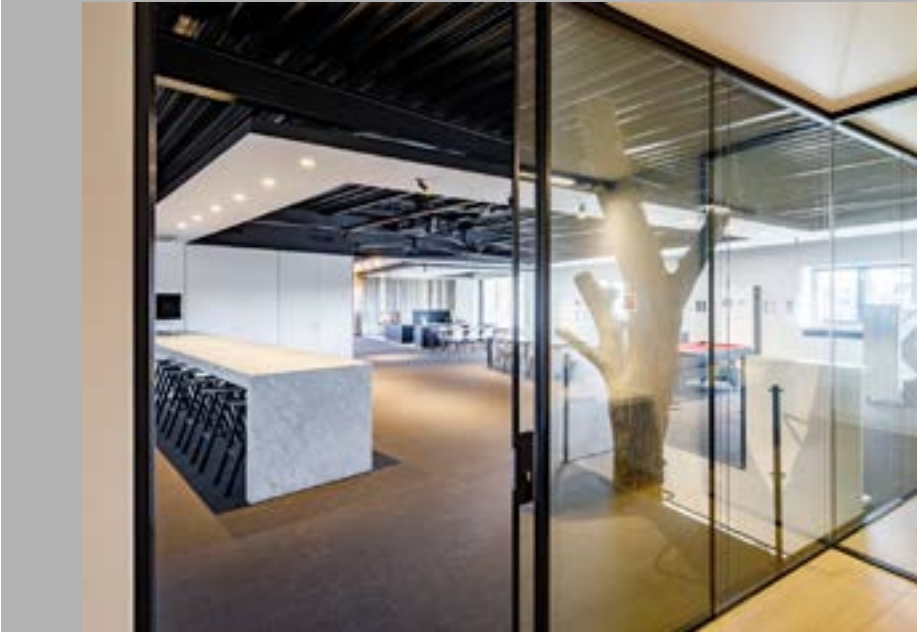

SECURITY

Smart door locks and camera systems give you complete control, no matter where you are. You can monitor everything live and easily **manage access** to your home remotely, always with peace of mind.

When alarm systems and motion detectors are integrated, you'll receive an **immediate notification** in case of suspicious activity, such as unwanted movement or a potential break-in attempt. You can **respond immediately** yourself: make the lights flash or move the blinds to deter intruders

FROM BASIC TO HIGH-END

Our experts are constantly updating our Duotecno home automation system with new features and technologies. You can always customize or expand the system to suit your own needs and budget. Home automation is future-proof and grows at your own pace.

The Duotecno home automation system is **decentralized and modular** in design. Each component is a separate module that is installed in the electrical panel and operates independently. This makes it easy to replace, expand, or optimize any module. You can add what you need, when you need it, without having to redesign the entire system. Each module has its **own intelligence**



USER-FRIENDLY

All devices are controlled via a Duotecno touchscreen, a tablet, or a smartphone. All of them are very easy to use, and great care has been taken to ensure **user-friendly** interfaces. The system communicates continuously with each other. This ensures that changes are kept up to date on all control panels. The integration of voice assistants—voice control—is also an option.

Through the CAN bus protocol and hardwired connections to your touchscreen, we guarantee the highest levels of **stability and speed**.



GREATER COMFORT

Automating routine tasks significantly improves your home comfort and efficiency. Automatic control and adjustment of lighting, electrical appliances, and heating are possible both **remotely** and when you are at home. Different settings based on time of day, weekly schedule, and climate (astrological clock) can be configured according to **your preferences**.





Brains 8

Smartboxes	10
Modules	16
Software	25
Gateway	30
Duotecno Academy	34
Schematic Diagrams	36


Beauty 48

Mechanical switches	50
Touch buttons	56
Oled switches	66
Installation	78
Integrated	80
Touchscreens	90
Detectors & sensors	99
Video Intercom & Acces Control	106
Audio & home cinema	116

Xillo 120

References	130
Case Study	136
Showrooms	138
Contact	142



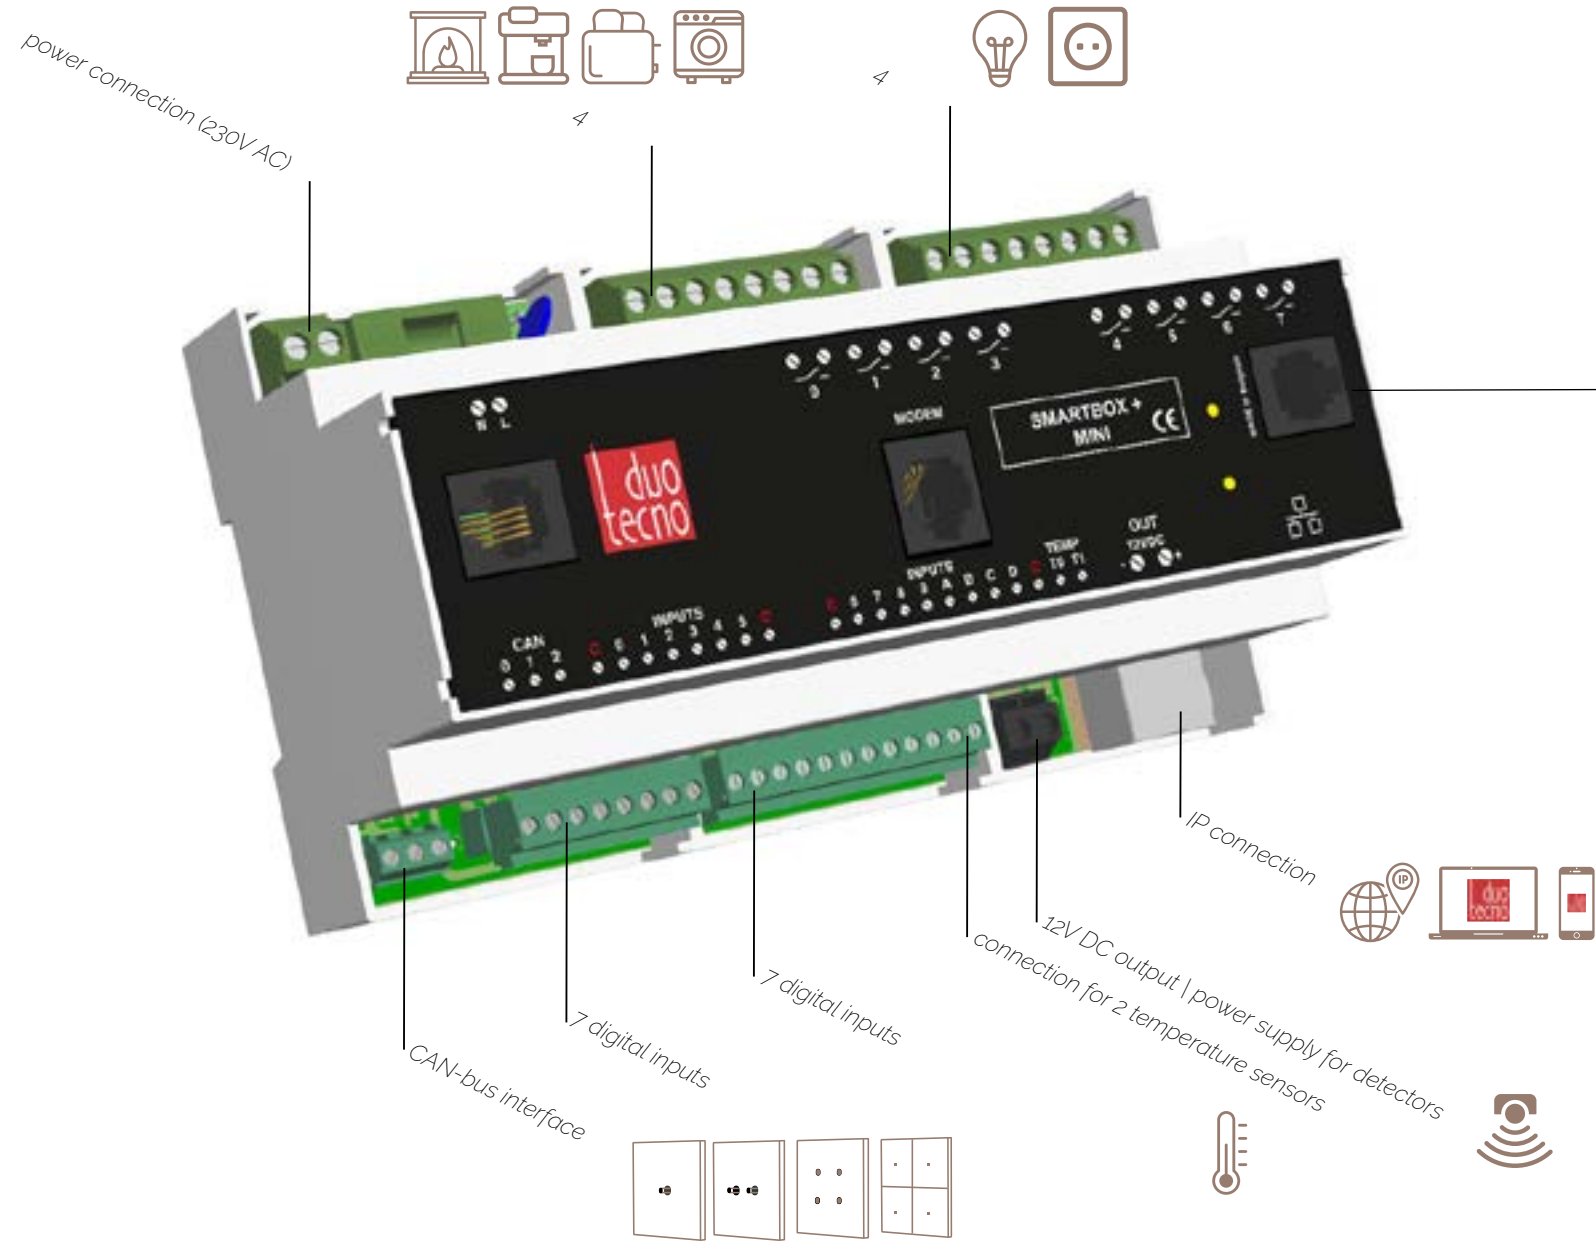

SMARTBOX *MINI*

Duotecno's **budget-friendly** starter kit provides a smart foundation with ample expansion options. This module is ideal as a starting point for smaller projects or as a complement to other Duotecno modules.

Multiple Smartboxes can be easily combined within a single project. In addition, the **Smartbox Mini** can be easily expanded with other Duotecno products, allowing the system to grow with your needs.

Thanks to the integrated **TCP/IP network interface**, up to **five devices**, such as smartphones and tablets, can connect to the system simultaneously. This way, you always stay in control, wherever and whenever you want.


Product code	DT0B-MINI
Width	9 modules
Number of inputs	14
Number of outputs	8
Dimmer options	0
Temperature sensors	2 connections
Up-down	0
12V DC power supply	6x DT40-xx



DUOTECNO LITE APP

With this Duotecno app, you can use your smartphone both indoors and outdoors as a central control panel for your Duotecno system. You can install this app on a smartphone (iOS or Android) from the App Store or Play Store.

Thanks to a modern and user-friendly design, you can control all functions quickly and easily. This includes switching lights and outlets, operating sunshades and roller shutters, and controlling music in different rooms...

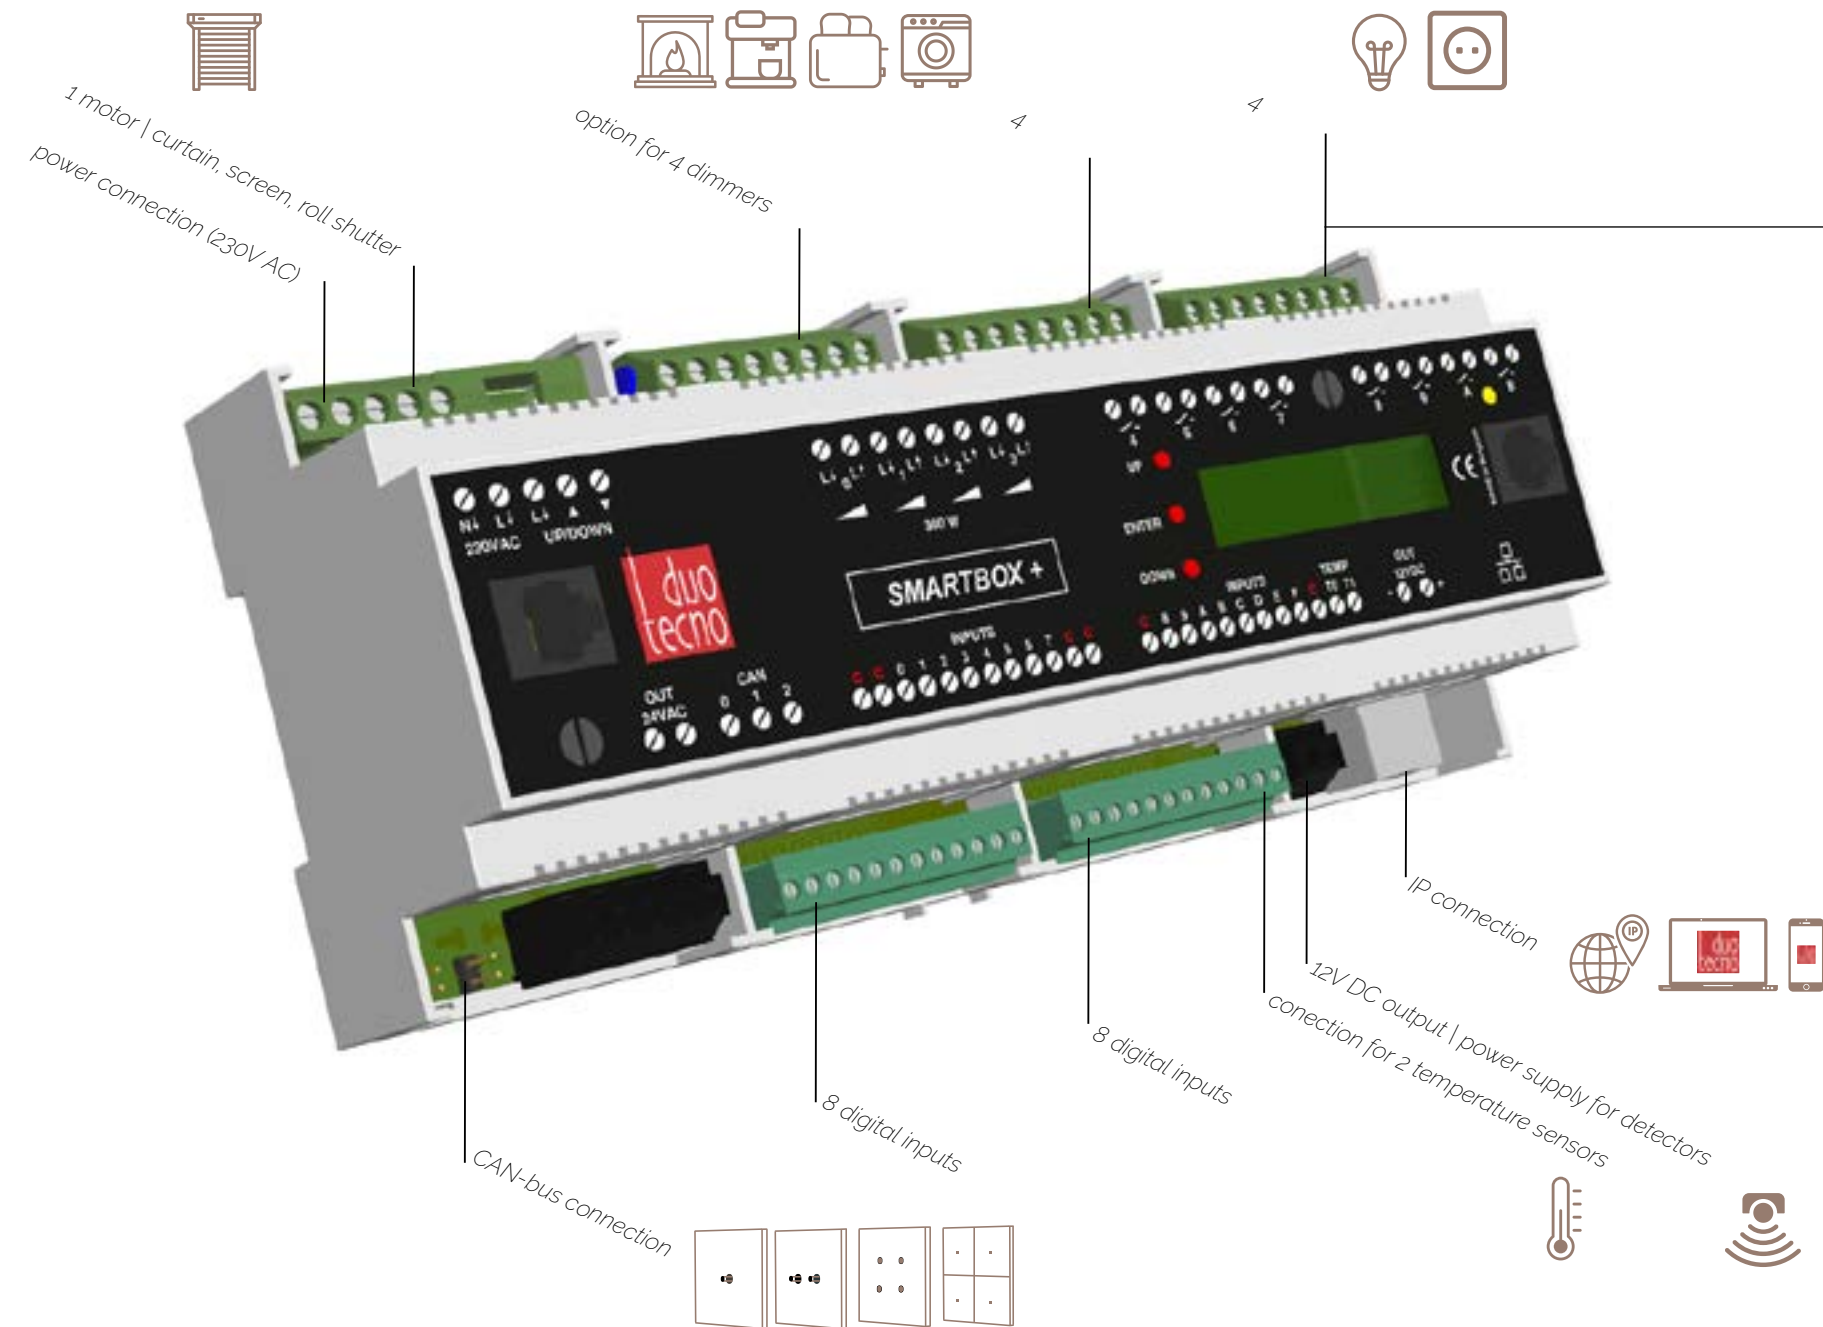

SMARTBOX *LITE*

Duotecno's budget-friendly starter kit with expansion options. The **Smartbox Lite** is ideal for use as a **basic home automation system**, but also for applications in hotel rooms, apartments, assisted living facilities, and more.

It is perfectly possible to combine multiple Smartboxes in a single project. The **Smartbox Lite** can be further expanded with other Duotecno products.

Thanks to the integrated **TCP/IP network interface**, up to **five devices**, such as smartphones and tablets, can connect to the system simultaneously. This way, you always remain in control, wherever and whenever you want.

Product code	DT0B-LITE
Width	12 modules
Number of inputs	16
Number of outputs	12
Dimmer options	4
Temperature sensors	2
Up-down	1
12V DC power supply	6x DT40-xx

PLUGIN DIMMERS

DT0B-DC



0-10V | 1-10V DIMMER

For externally controlling drivers or other systems that require an analog voltage.

DT0B-LE



LEADING EDGE DIMMER

300W resistive, 250VA inductive. For 230V leading-edge dimming of lighting (incandescent bulbs and transformers).

DT0B-TE



TRAILING EDGE DIMMER

300 W, 250 VA (capacitive). For 230 V trailing-edge phase-cut dimming of LED lighting.

DT0B-R



RELAIS 300W RESISTIEF

Potential-free contact.

DT0B-SSR



SOLID STATE RELAIS



300W resistive. Switches a 230V load at zero crossing, thereby preventing inrush and switch-off spikes for highly inductive and capacitive loads.

DT0B-PWM



PWM LED DIMMER

2A @24V DC. Powering LED strips at 12V or 24V DC.

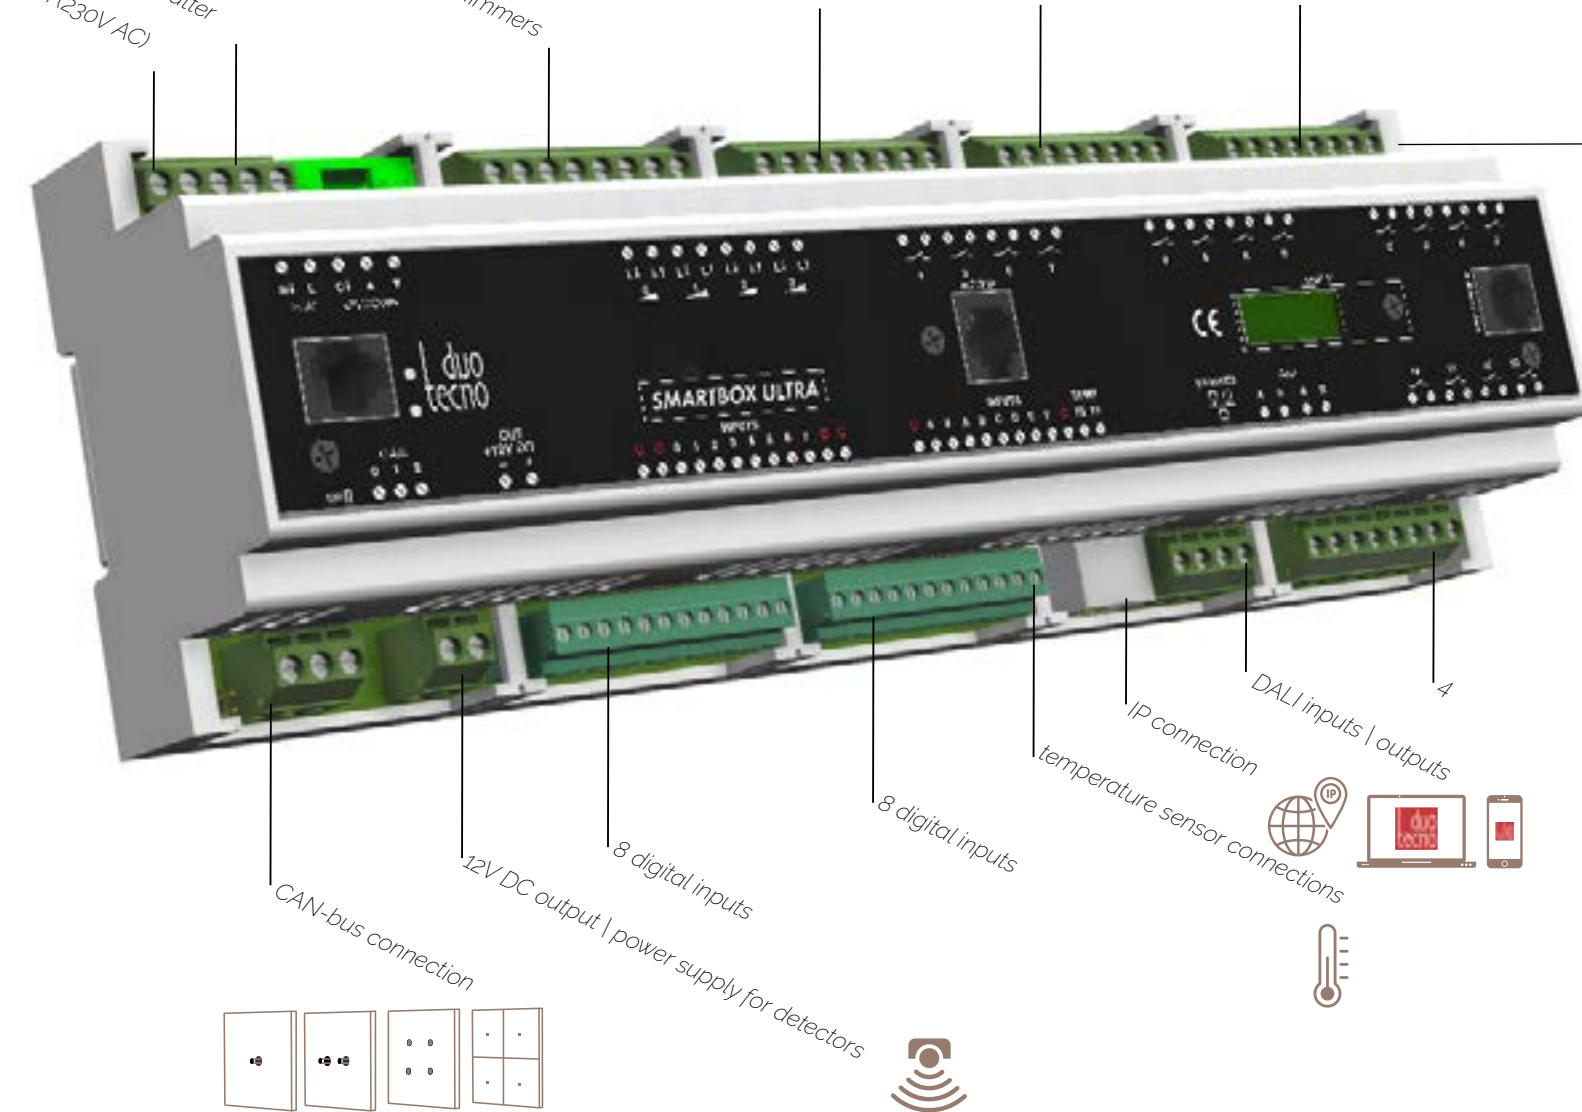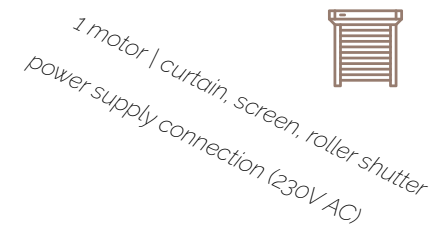

SMARTBOX *ULTRA*

Our most **comprehensive Smartbox** yet. A powerful and innovative addition to the Smartbox range, designed for projects that demand **maximum flexibility, scalability, and functionality**. A single powerful **all-in-one Smartbox Ultra** replaces no fewer than 7 modules.

Thanks to the **built-in master**, remote programming is effortless and reliable. The simple and seamless **DALI integration** capability also positions the Smartbox Ultra as a true pioneer in the industry, suitable for the most demanding home automation projects.

Product code	DT0B-ULTRA
Width	15 modules
Number of inputs	16
Number of outputs	16
Dimmer options	4
Temperature sensors	2
Up-down	1
12V DC power supply	6x DT40-xx
DALI	depending on the selected interface

DALI INTERFACES

NO INTERFACE
64 button interfaces

SB ULTRA
WHITE INTERFACE

DTob-DAL12
64 button interfaces
max. 12 DALI outputs
max. 4 DALI groupes

SB ULTRA
RED INTERFACE

DToB-DAL64
64 button interfaces
max. 64 DALI outputs
max. 16 DALI groupes



Modules

Thanks to their standard dimensions, the modules are very easy to mount on a DIN rail in an electrical panel. With automatic addressing, they offer the flexibility needed to make unlimited modifications and expansions in the future. All common home automation systems can be controlled using these modules.

Importantly, each module has its own CPU (intelligence). This means that our system is not dependent on a central hub or computer.

Modules | POWER & SWITCH

POWER SUPPLY

24V AC POWER MODULE

Power supply for the system, which operates on 24-volt AC.

Productcode
Width
DT00-24
9 modules



POWER SUPPLY

24V AC + 2P CAN SWITCH

2-channel CAN switch with built-in power supply.

Productcode
Width
Channels
DT00-24SW
9 modules
2



CAN SWITCH

4P CAN SWITCH

4-channel CAN switch.
This module is used to resolve star topologies
and extend the bus.

Productcode
Width
Channels
DT13-SW
12 modules
4



CONVERTER

BUS CONVERTER

RJ11 <> FTP Bus Converter
DIN-rail module with an FTP connector on the bottom
and an RJ connector for the bus.

Productcode
Width
DT0E-00
2 modules





6 CHAN. LEADING EDGE FASE MODULE

DIMMING

Productcode	DT05-06	6-channel 500W dimming module.
Width	9 modules	Dimming and switching of 6 lighting circuits up to 500W per channel.
Channels	6	Via phase control.



6 CHAN. TRAILING EDGE FASE MODU-

DIMMING

Productcode	DT05-06TE	6-channel 500W dimming module.
Width	9 modules	Dimming and switching of 6 lighting circuits up to 500W per channel.
Channels	6	Via phase cut-off.



DALI INTERFACE

DIMMING

Productcode	DT13-DAL	Interface for controlling DALI lighting.
Width	4 modules	
Adresses	64	
Channels	16	



6 CHAN. ANALOG OUTPUT MODULE

DIMMING

Productcode	DT02-06	6-channel 0-10V / 1-10V dimming module with relay.
Width	9 modules	Dimming of 6 fluorescent lights and LEDs.
Channels	6	Operates on 0-10V or 1-10V (selectable via jumper) and features a relay output for complete shutdown
Voltage	0-10V/1-10V DC	



6 CHAN. LED PWM DIMMER MODULE

DIMMING

Productcode	DT06-06	6-channel LED PWM dimming module.
Width	9 modules	Dims 6 LEDs using Pulse Width Modulation (PWM) technology.
Channels	6	Can drive up to 120W 5A @ 24V DC per output.
		Ideal for LED strips. 60W 5A @ 12V DC up to 500W per channel.
		Via phase control.



DMX INTERFACE

DIMMING

Productcode	DT13-DMX	Interface for controlling DMX lighting.
Width	4 modules	
Channels	6	



6 CHAN. RELAIS NO CONTACT MODULE

RELAY

Productcode	DT03-06	6-channel 16A relay contact module.
Width	9 modules	Turns 6 outlets and/or light circuits on and off.
Channels	6	Can also be used for appliances, ventilation,
Relay	16A	heating, or locks.



12 CHAN. RELAIS NO CONTACT MO-

RELAY

Productcode	DT03-12	12-channel 16A relay contact module.
Width	9 modules	Controls the on/off switching of 12 outlets and/or lighting circuits.
Channels	12	Can also be used for appliances, ventilation,
Relay	16A	heating, or locks.



6 CHAN. RELAIS NO CONTACT MO-

RELAY

Productcode	DT03-06NC	6-channel 16A relay NC contact module.
Length	9 modules	Relay module with 6 normally closed relays.
Channels	6	This module is typically used to
Relay	16A	disconnect the power supply to external peripheral devices.

ANALOG

16 CHAN. ANALOG INPUT MODU-

Productcode	DT07-16	16-channel NO/NC + 2-channel analog input module.
Width	9 modules	16 inputs for push buttons and/or motion detectors,
Channels	16	plus 2 temperature sensors.
Voltage	NO/NC	
Temperature	2	



ANALOG

8 CHAN. ANALOG INTERFACE MO-

Productcode	DT13-ANA	Analog Interface Module, 8 analog inputs,
Width	4 modules	8 temperature inputs.
Channels	8 analog channels can be used for temperature	



ANALOG

PUSH-BUTTON INTERFACE

Productcode	DT0E-0S	Input module for 8 push buttons and 2 temperature sensors.
Dimensions	50 x 50 x 18 mm	This interface is integrated into the switch's flush-mount housing,
Channels	8	allowing a standard push button to be connected directly to the
Temperature	2	bus



ANALOG | DIGITAL

LEVEL CONTROL MODULE

Productcode	DT13-LC	Level Control, 16 digital and 8 analog inputs,
Width	4 modules	8 temperature inputs.
Channels	16 digital, 8 analog can be used for temperature	



Universal level/voltage converter.
8 inputs: 0-10 V, 1-10 V, 0-5 V, 1-5 V, 0-20 mA, 4-20 mA.
Connects to a wide variety of sensors:
weather, level, and air quality sensors.

VOLTAGE CONVERTER

Productcode	DT0E-0I
Width	4 modules
Channels	8



3 CHAN. UP DOWN MODULE

CONTROL

Productcode	DT04-03	3-channel 16A up/down module.
Width	9 modules	Controls 3 motors for roller shutters, curtains, or awnings...
Channels	3	These motors operate on AC power.
Relay	16A	3 wires: common, up, and down.



6 CHAN. UP DOWN MODULE

CONTROL

Productcode	DT04-06	6-channel 16A up/down module.
Width	9 modules	Controls 6 motors for roller shutters, curtains, or awnings...
Channels	6	These motors operate on AC power.
Relay	16A	3 wires: common, up, and down.



3 CHAN. UP DOWN MODULE POLARISED

CONTROL

Productcode	DT04-P3	3-channel 10A up/down module with polarity.
Width	9 modules	Controls 3 motors for roller shutters, curtains, or awnings.
Channels	3	These motors operate on DC voltage.
Relay	10A	2-wire.

HVAC

MODBUS INTERFACE

RS485 MODBUS Interface.	Productcode	DT13-MOD
This interface acts as the master within the Modbus network.	Width	4 modules
Heating, air conditioning, ventilation...		



AUDIO

IP AUDIO INTERFACE + 8 CHAN. IR OUTPUTS

IP Audio Interface	Productcode	DT10-AU
IP connectivity with NAD, Bluesound, and Sonos.	Width	9 modules
8 IR outputs for controlling devices: Set-top box and Apple TV	Channels	8



IP

TCP IP PRO SERVER

TCP/IP Pro Server. Network connection.	Productcode	DT18-PRO
This module functions as a programming interface over IP.	Width	9 modules
This module establishes an IP connection if there is no touchscreen available for the Pro App.		



IP

DUOTECNO GATEWAY

Duotecno Gateway.	Productcode	DT18-GT
This module acts as a bridge between the Duotecno Open TCP/	Width	6 modules
IP protocol and other Internet of Things applications.		





TWILIGHT

With this Twilight Module, you can synchronize your daily routine with your surroundings—whether it's the weather, temperature, day or night, or hot or cold. When integrated, these factors can all serve as triggers to control lighting, screens, or appliances. Module with 8 inputs.

- Smart twilight switch with outdoor temperature sensor
- Eight-step transition from daylight to complete darkness
- Perfectly compatible with sun protection systems and lighting
- Perfectly compatible with Duotecno motion detectors

Productcode	DTTL-00
Width	9 modules
Inputs:	8
Sun sensor	
Outdoor temperature	
Twilight switches	



met bijhorende opbouwsensor



PROGRAMMATIE MODEM

USB programming modem, including binding soft-

Productcode	DT0F-00
-------------	---------

Our intelligent software is the beating heart of every Duotecno installation. From the powerful Binding Software, which ensures seamless coordination between all components, to the user-friendly Configurator for customizing layouts, scenes, and timings.

Every tool is designed for maximum control and flexibility. With the Duotecno Pro App on your smartphone and tablet, you can easily access your home's automation system and adjust settings and moods.



Software ▶

BINDING SOFTWARE


Programming during system startup and in the event of any changes is performed using the Binding Software. This software runs on the Windows platform and is as easy to use as a web browser.

Many features are already pre-programmed. This makes home automation very easy and flexible to configure. The inclusion of our unique "Auto Binding" feature makes it possible to perform the configuration quickly and error-free.

CONFIGURATOR

The Duotecno Configurator is an additional and complementary software package. It allows you to create, customize, and save different scenes using a computer. The infrared codes for audio and video can be retrieved and transmitted. You can enter and transmit temperature schedules and time controls for each room.

If you wish to customize the touchscreen icons, you can do so using the user-friendly software. When you purchase the USB modem, the Binding Software and the Configurator are included free of charge.

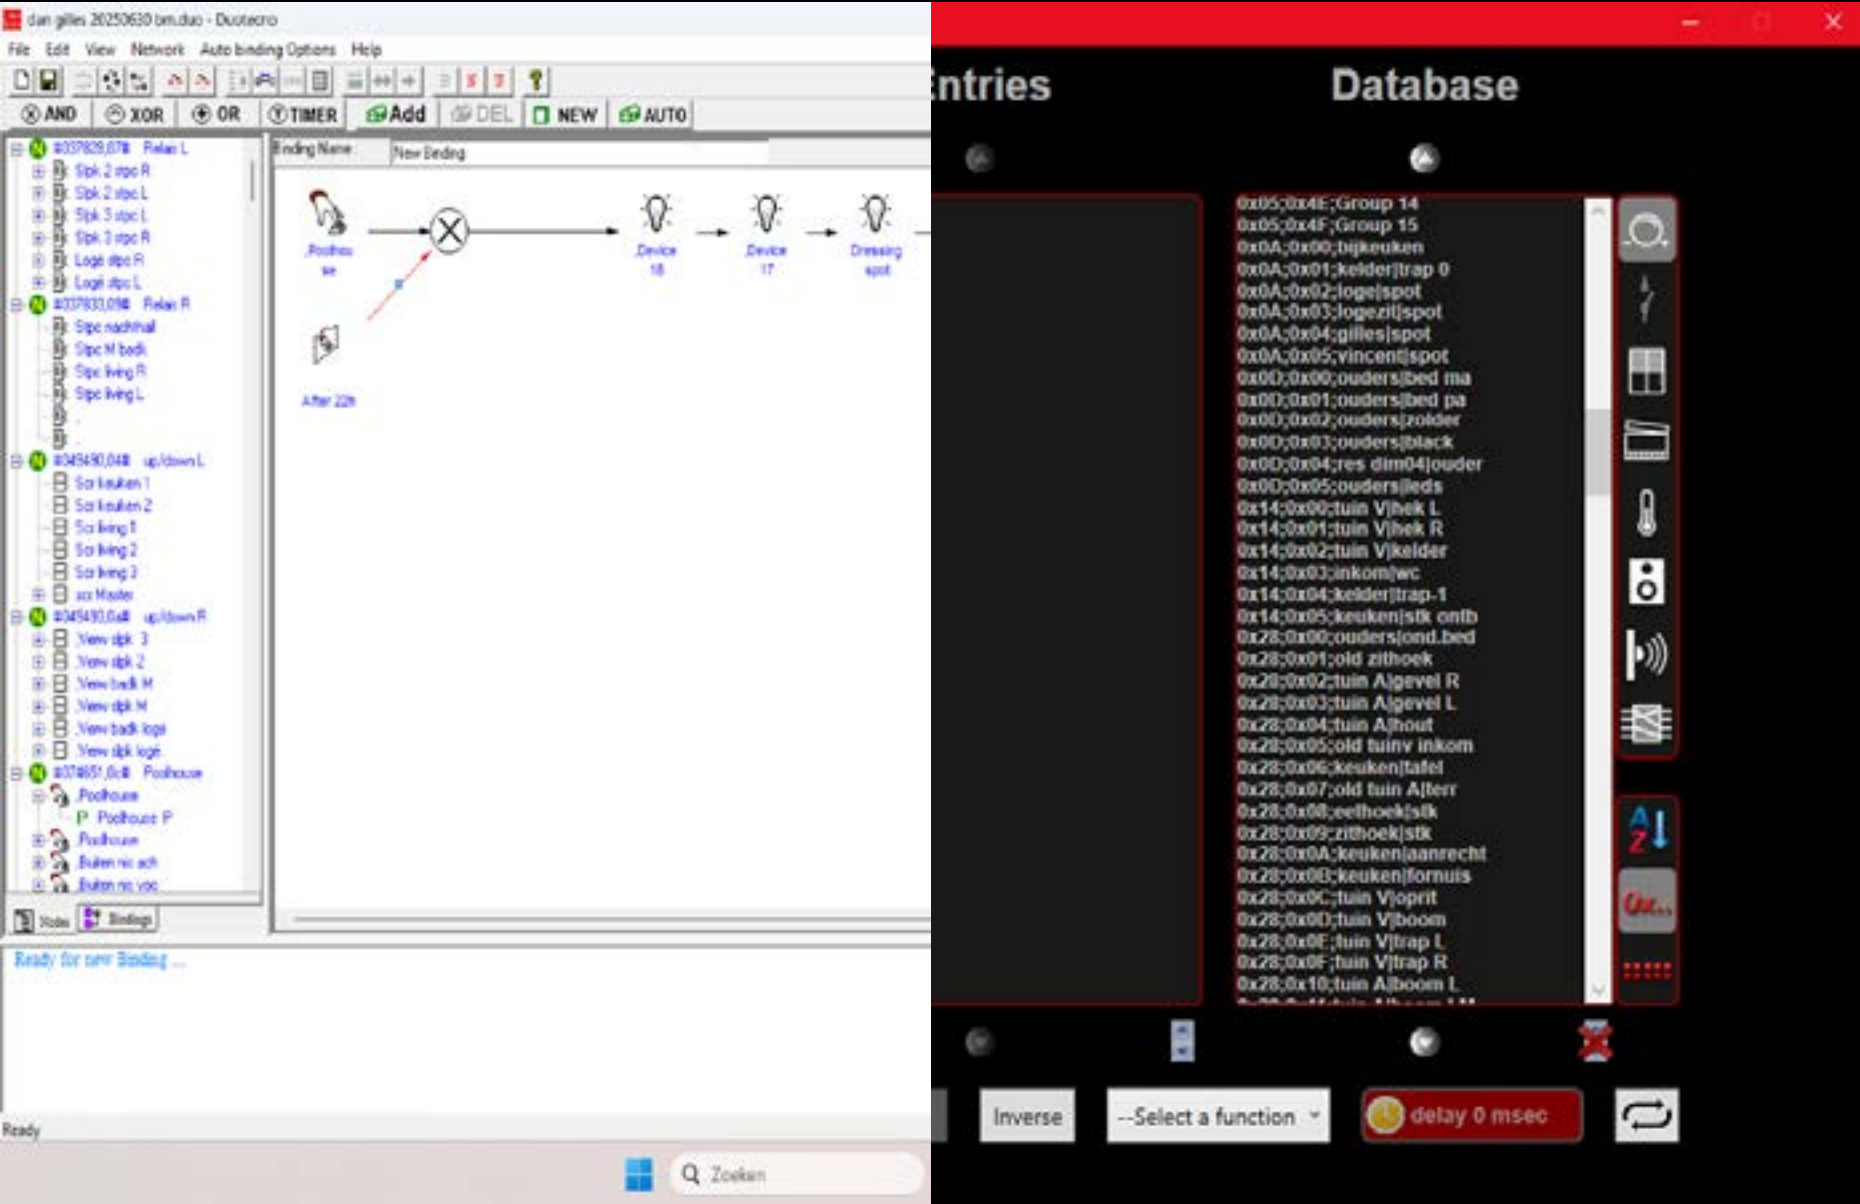






DUOTECNO PRO APP

With the Duotecno Pro App, you can activate different moods. You can also control the heating, temperature, and ventilation perfectly—even remotely.

All programming within the Pro App can be personalized to suit your own needs and preferences, with numerous graphical options (customizing photos & layout), a favorites page, and the ability to customize moods.

The layout of the Duotecno touchscreen is mirrored within this application. Images and screen mapping thus become instantly recognizable elements.

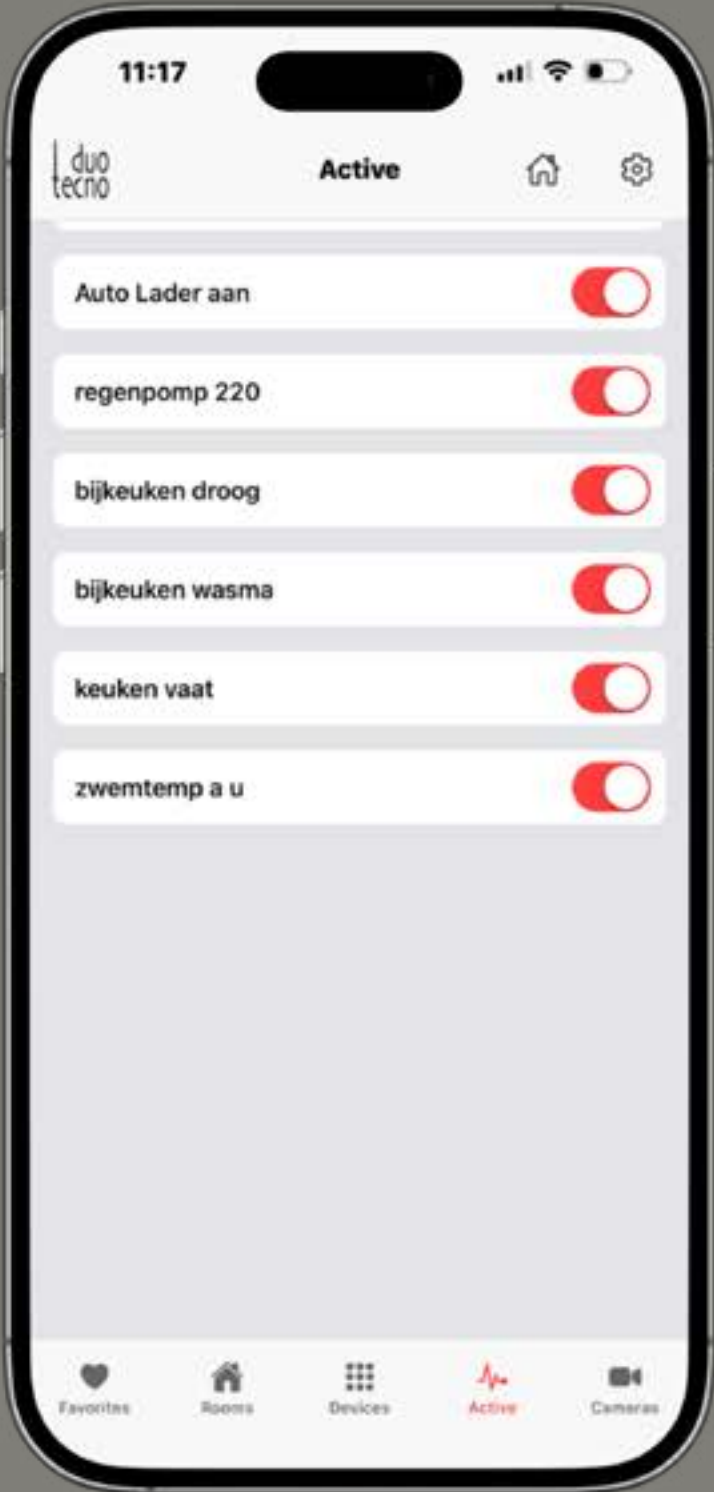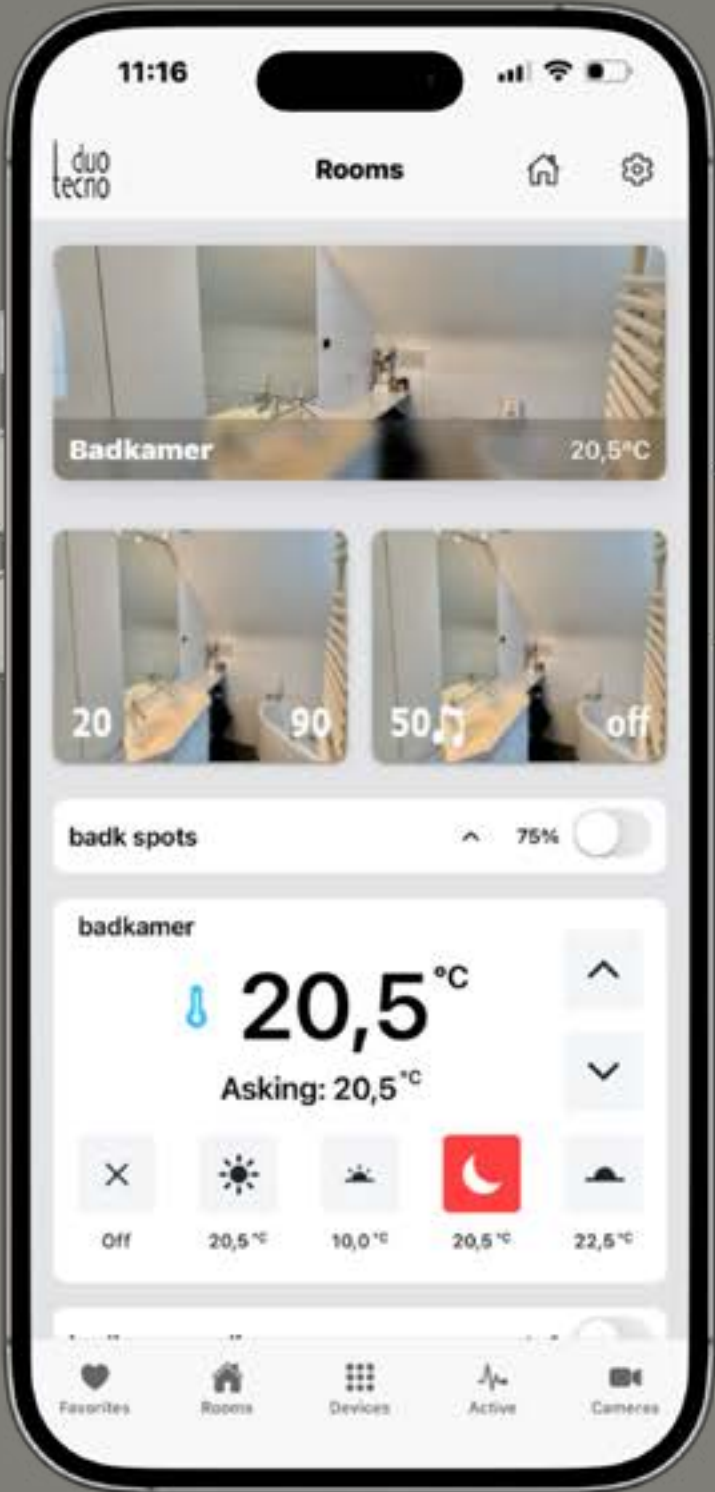

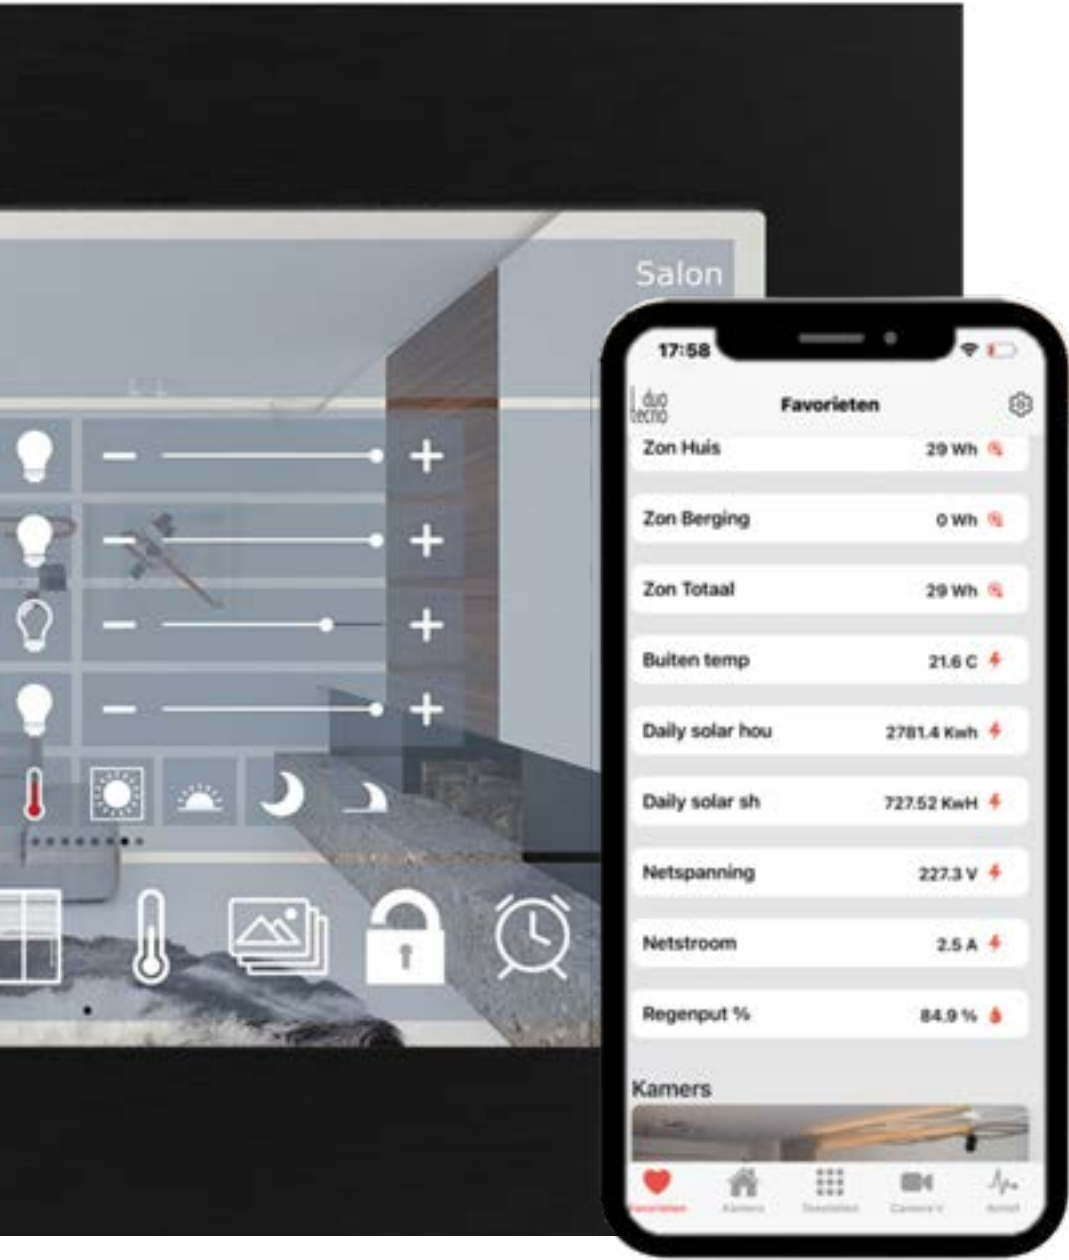

DUOTECNO GATEWAY


Productcode	DT18-GT
Width	6 modules

This module bridges the gap between the Duotecno Open TCP/IP protocol and other Internet of Things applications. All collected data is consolidated into a single interface and application.

As a home automation specialist, our core focus has traditionally not been on energy management. Yet today, we cannot ignore the fact that the smart and efficient use of energy plays a crucial role in modern homes and buildings. Driven by this conviction, we have delved into the world of energy management in recent years, with the goal of offering a powerful and forward-looking solution within our Duotecno (eco)system.

We position ourselves as an objective, advisory partner that strives for the seamless integration of energy management systems and third-party applications—regardless of their technical discipline. Whether it involves heating, cooling, ventilation, lighting, geo-thermal energy, fire detection, CO2 measurements, home batteries, or charging station management: we provide a single, unified interface where all information converges.

By centralizing data from external measurement systems via our Duotecno Gateway, a powerful information hub is created within the Duotecno App. This aggregated data offers our users not only comfort and ease of use, but also insight: from energy yield to consumption, from actual costs to optimizations. Consider, for example, responding to capacity tariffs, monitoring self-consumption, or managing a battery based on current consumption profiles. Our integration is designed with flexibility, scalability, and transparency in mind. This way, we don't create a closed system, but rather an intelligent network that adapts to the needs of today and tomorrow.

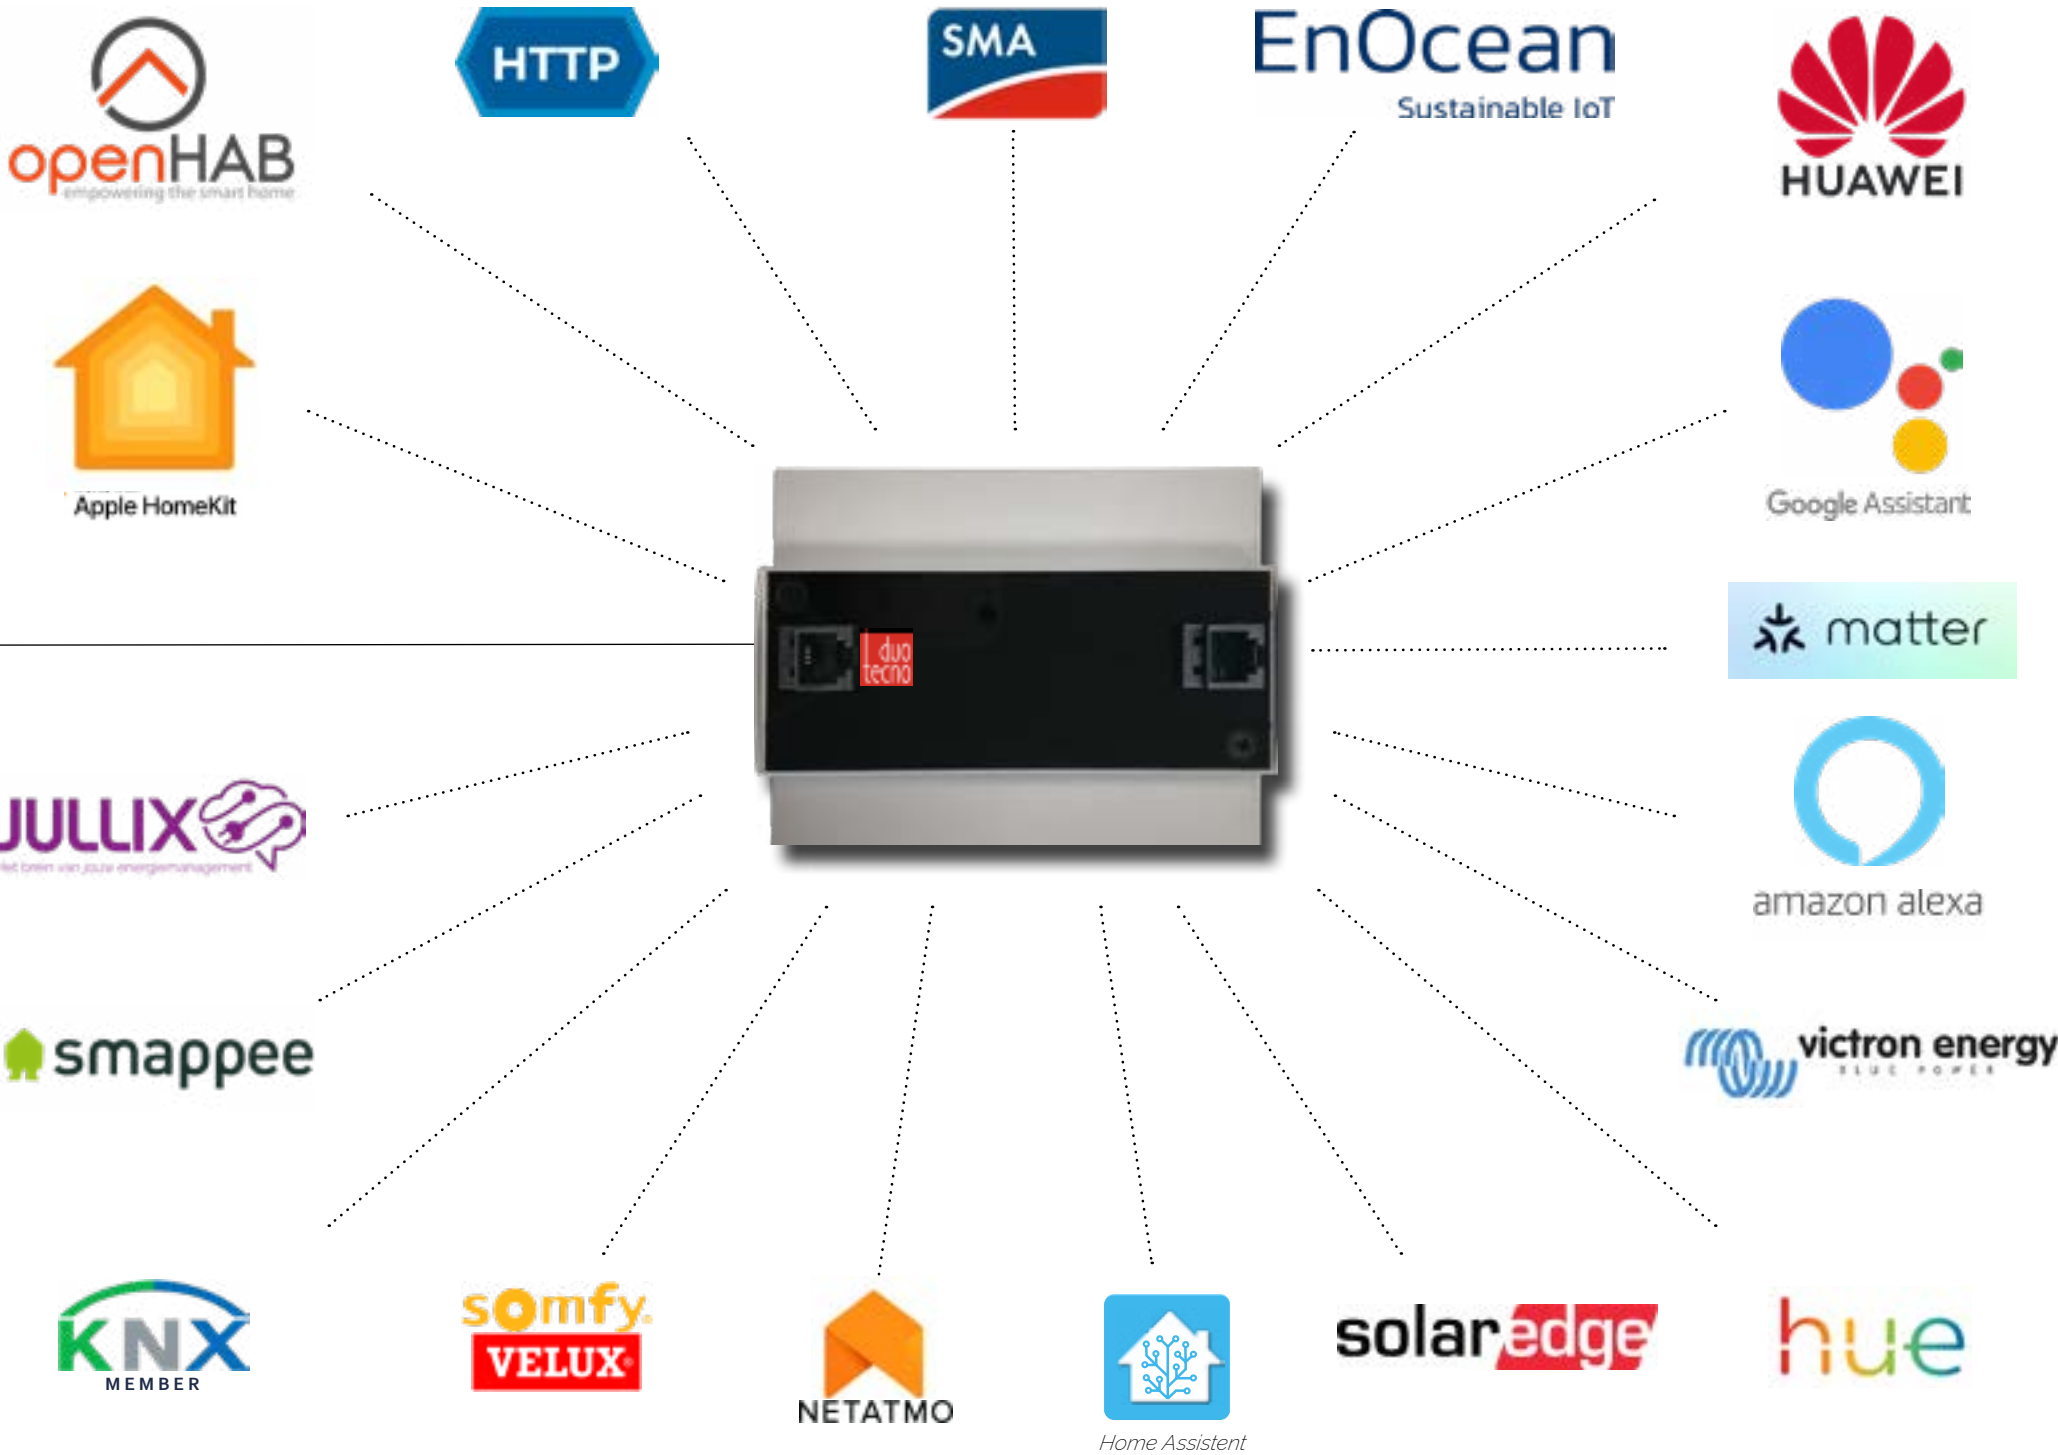

This diagram shows how various smart systems in the home are connected to each other via the Duotecno Gateway, enabling centralized energy management.


On the left, you can see all the devices connected to the home automation system via physical cabling. By using the right module in the electrical panel, a wide range of functions can be controlled with 100% reliability. Think of lighting, outlets, sensors, cooling and heating, curtains, roller shutters, sunshades...

In addition to physical cabling, many new household appliances feature an Internet of Things (IoT) application. This allows them to communicate via the Wi-Fi network (through the cloud) with external monitoring systems and, in some cases, even with each other. A great deal of data from these devices (washing machine, oven, charging station...) can be stored and processed.

In addition to these household appliances, homes are increasingly equipped with solar panels and home batteries. Due to the complexity of such installations, physical cabling and inverters are required. External measurement systems are also connected to these installations, often via physical dongles.

The external monitoring systems can receive, process, and transmit data from all these devices and systems. They are responsible for collecting data on energy production, consumption per device, battery charge status, grid consumption, and providing corresponding analysis. When is energy cheap or in abundance?

The findings from the analysis and all associated data are communicated to the Duotecno Gateway. Devices can be controlled using triggers and actions. For example, heat pumps, appliances, and charging stations are automatically activated at the most cost-effective time. The Gateway also handles the visualization of the data. This centralizes everything and makes it visible via the Duotecno App.

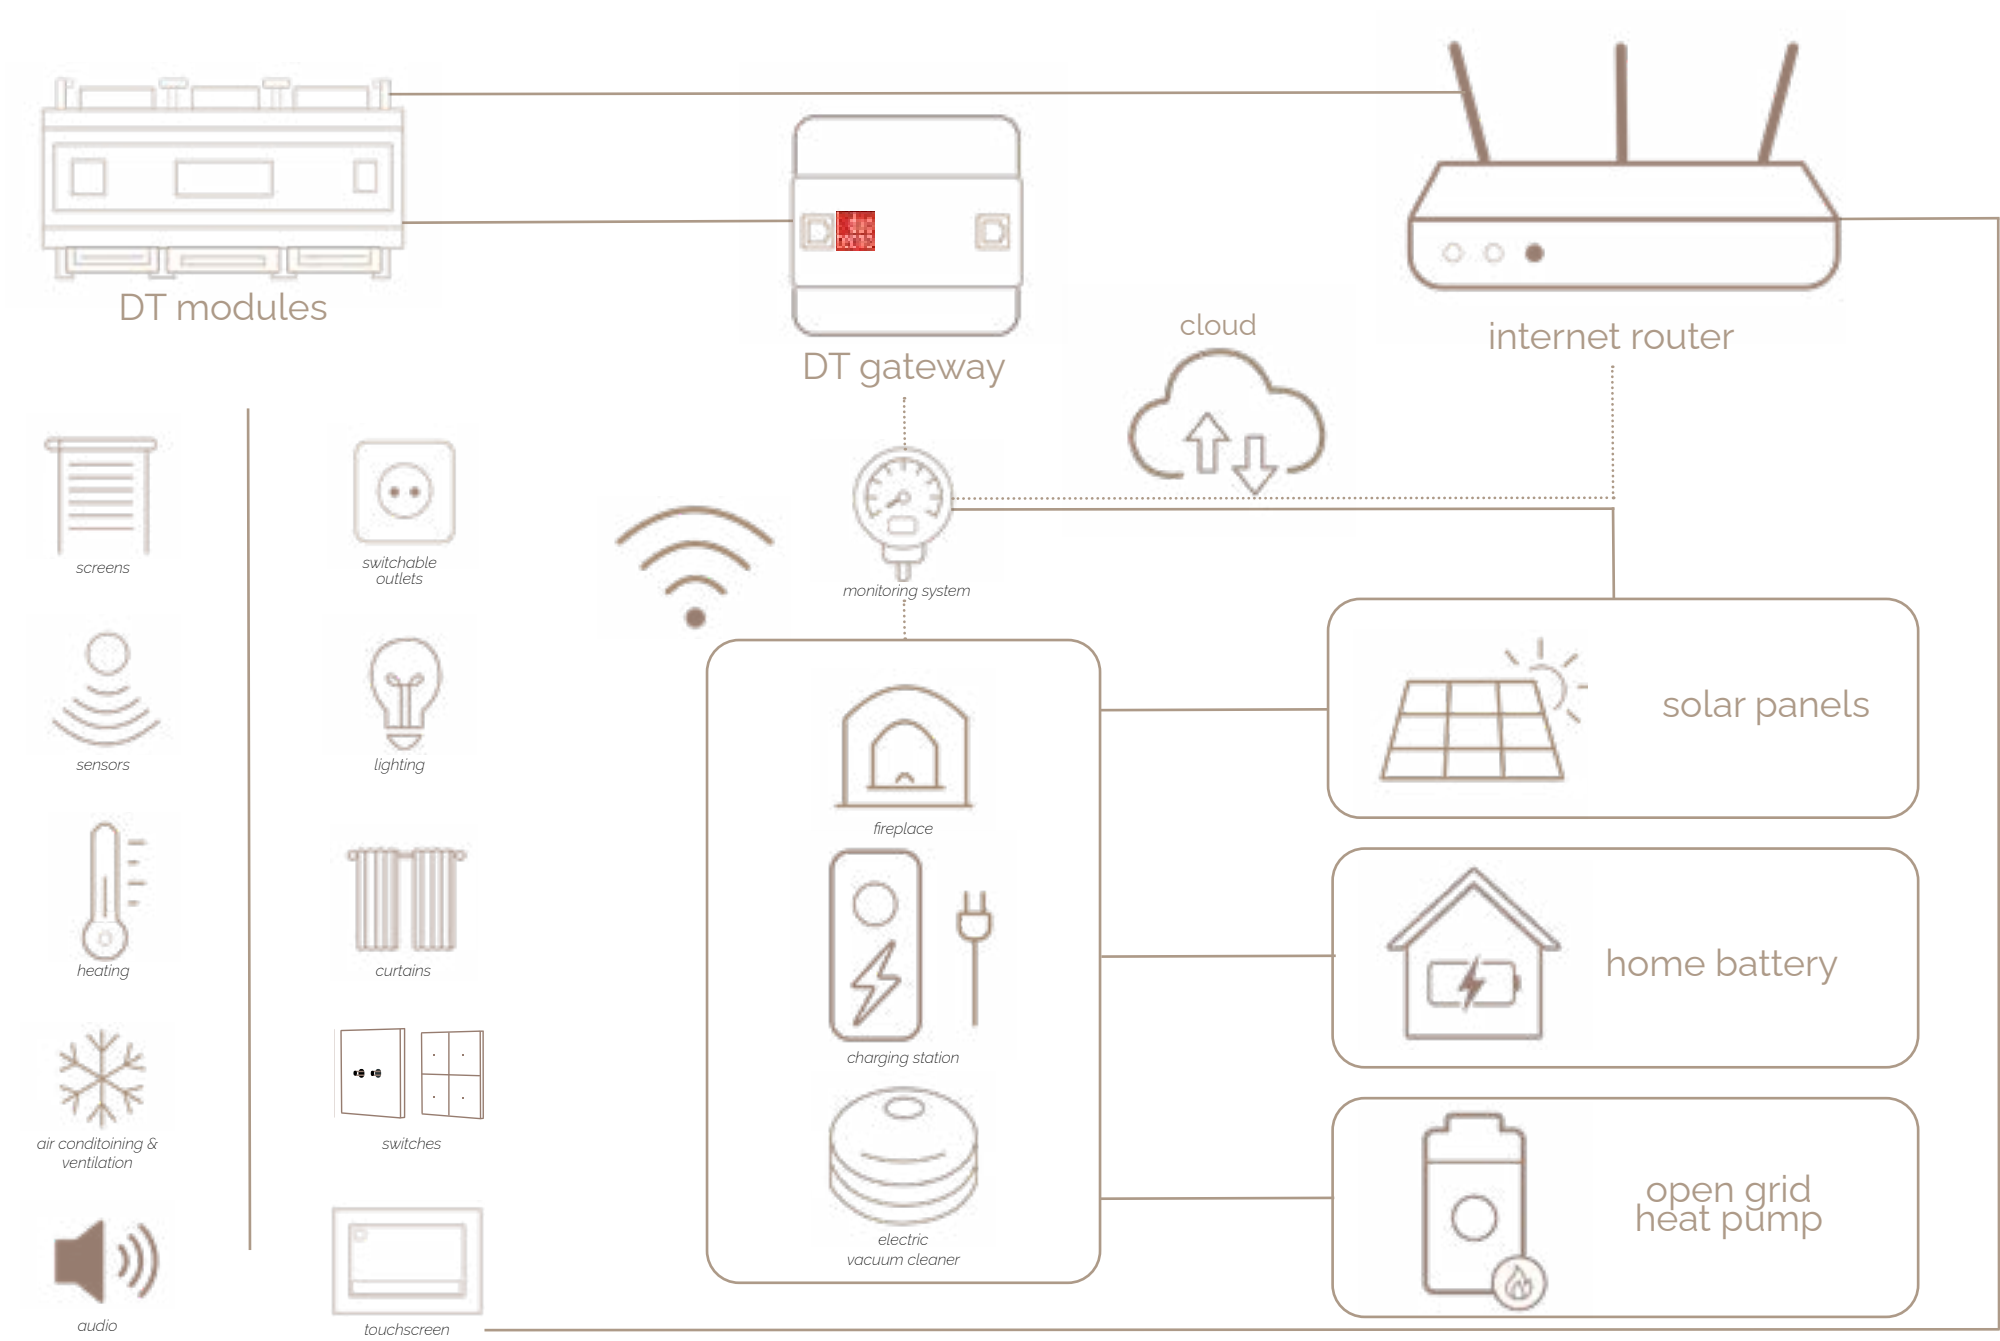



DUOTECNO ACADEMY

Discover all the features of our Duotecno hardware

At Duotecno, we believe in long-term partnerships and smart technology. Our training courses are designed to guide not only installers, but also interested end customers with a strong interest in home automation, in discovering and mastering our system.


Every month, we organize hands-on training courses structured into three clear sections: hardware, software module 1 (binding software & configurator), and software module 2 (application). For those who want to delve deeper, we offer an expert course twice a year on the Pro application, audio integration, and the Duotecno Gateway.

What makes us unique? Our training courses are led by experienced professionals from the field. No dry theory, but real tips & tricks, solutions to specific situations, and close collaboration between manufacturer and installer. This way, we build not only knowledge but also trust: the foundation of a strong and stable partner network.

Thanks to this approach, the end customer also benefits from a professional, trained installer who is fully familiar with the system. A win-win for everyone, resulting in: excellent installation quality and a close relationship with the manufacturer.



Principeschema | SMARTBOX

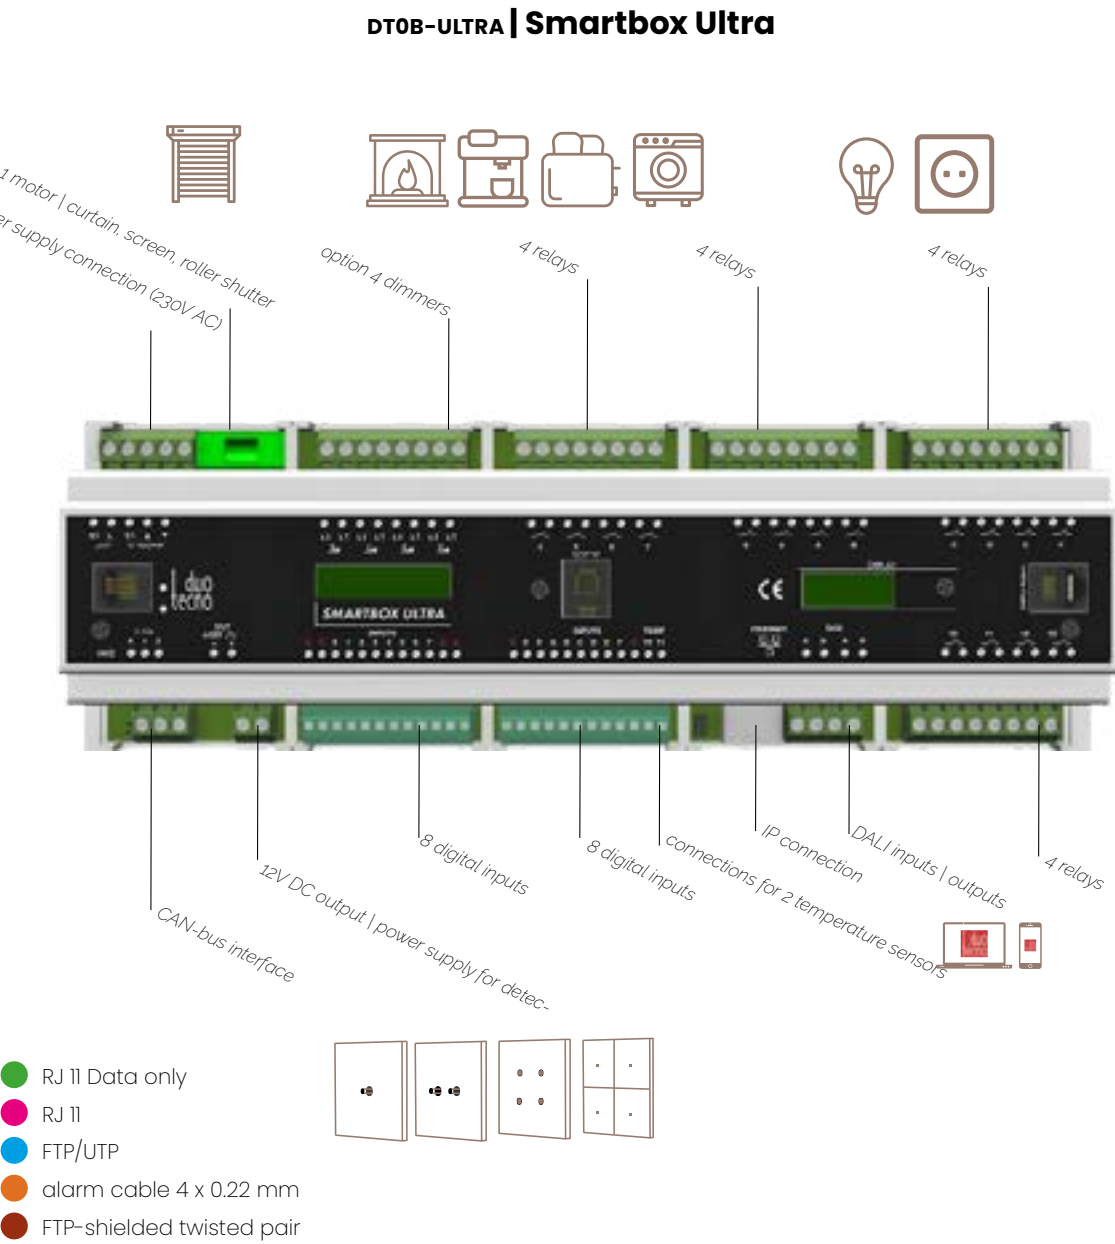

DT00-24 | 24 VAC power supply mo-



Power supply for Duotecno CAN components
2x 1.85 A

DT05-06 | 6 channel 500W DIM



6-channel phase-cut dimmer
for dimming lights &
switched outlets

DT05-06TE | 6 channel 500W DIM



6-channel phase-cut dimmer
dimming LED lighting

DT02-06 | 6 channel DIM + REL



6 channels 0-10V/I-10V
dimming of all lighting/drivers
that are 0-10V or I-10V dimmable

DT06-06 | 6 channel led PWM DIM



6-channel 10A PWM dimmer
dimming LED strips

DT0E-00



DT13-DAL



Dali bus
power sup-



DT13-DMX



Dimming of DALI lighting
Up to 64 addresses
16 groups per module

Dimming of DMX lighting
up to 64 addresses per

Schematic diagram | MODULES

CAN-bus



24V AC power supply
2x 1.85 A
power supply for CAN components
Duotecn modules



6 to 12-channel relay
for controlling lighting,
outlets & appliances
coffee makers, door locks...




3 to 6 up/down channels
for controlling roller shutters, screens,
blinds,



DT07-16 | 16 chan. NO/NC + 2 analog



16 digital input channels + 2 temperature sensors
push buttons, motion sensors...




DTTL-00 | twilight module



8 analog inputs for push buttons,
motion sensors...
sunlight sensor, outdoor temperature
twilight switch



DT13-LC



level control module
16 digital + 8 analog inputs


DT0E-01



sensors with a signal of
0-10V/0-5V/0-20mA/4-20mA
wind sensors, level sensors, CO2 sensors,
humidity sensors, rain sensors...

- RJ 11 Data only
- RJ 11
- FTP/UTP
- alarm cable 4 x 0.22 mm
- FTP-shielded twisted pair

Schematic diagram | OPERATI-

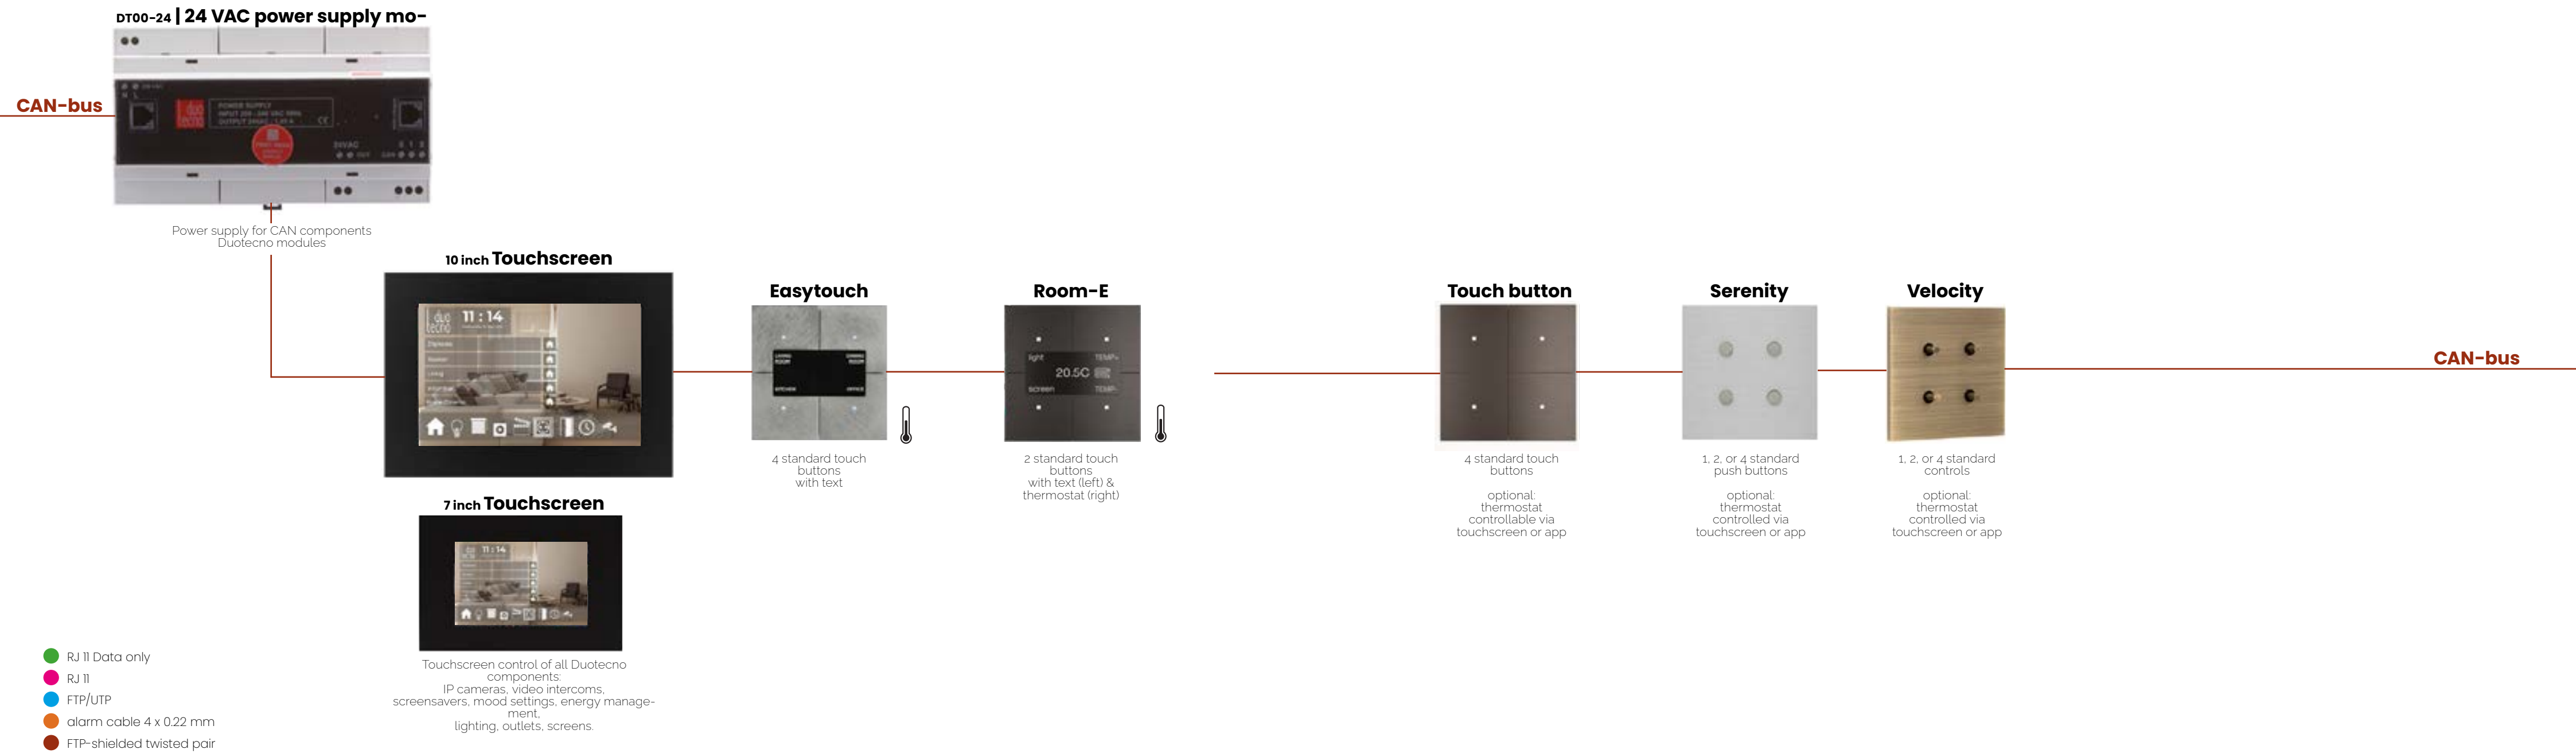


Schematic diagram | HVAC

CAN-bus



6- or 12-channel relay module

solar collectors, patio heaters, ceiling, wall, or patio panels for heating spaces, towel warmers, electric heating or hot water, control of underfloor heating, radiators, boilers, circulation pumps, heat pumps...

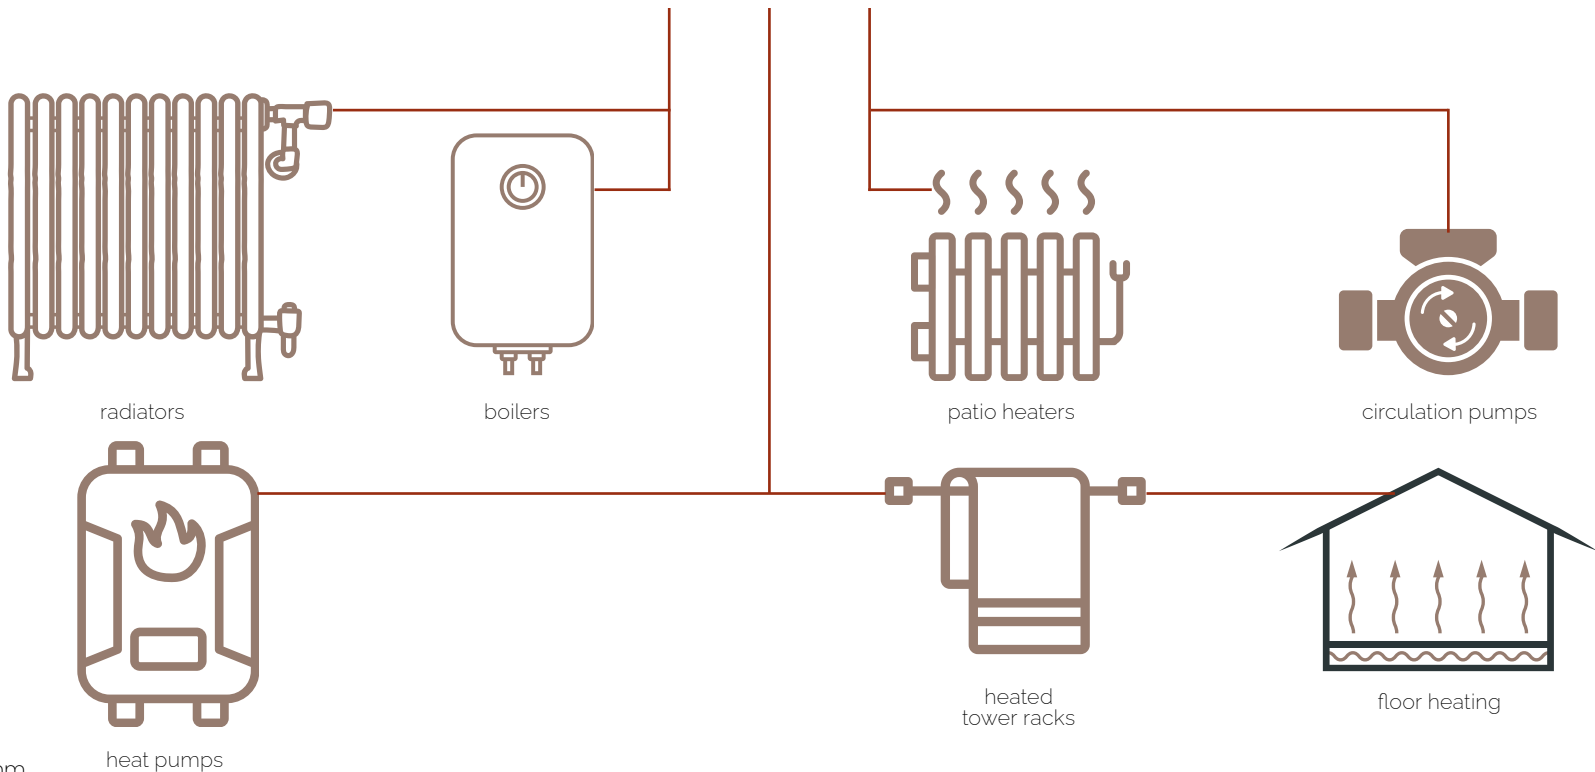


- RJ 11 Data only
- RJ 11
- FTP/UTP
- alarm cable 4 x 0.22 mm
- FTP-shielded twisted pair

DT02-06 | 6 channel 0-10V




Specially developed PID control, The closer the temperature is to the setpoint, the slower the ventilation.

jaga

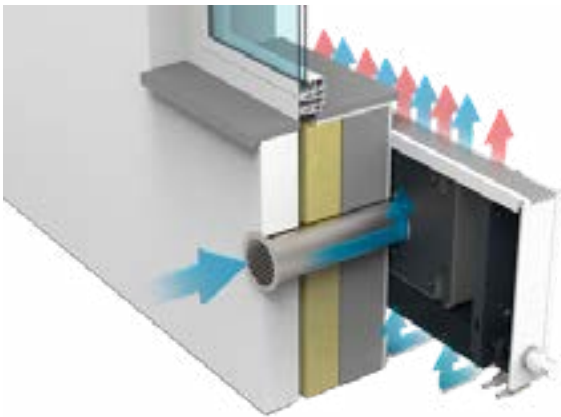


DT13-MOD Modbus



Schematic diagram | AUDIO

CAN-bus

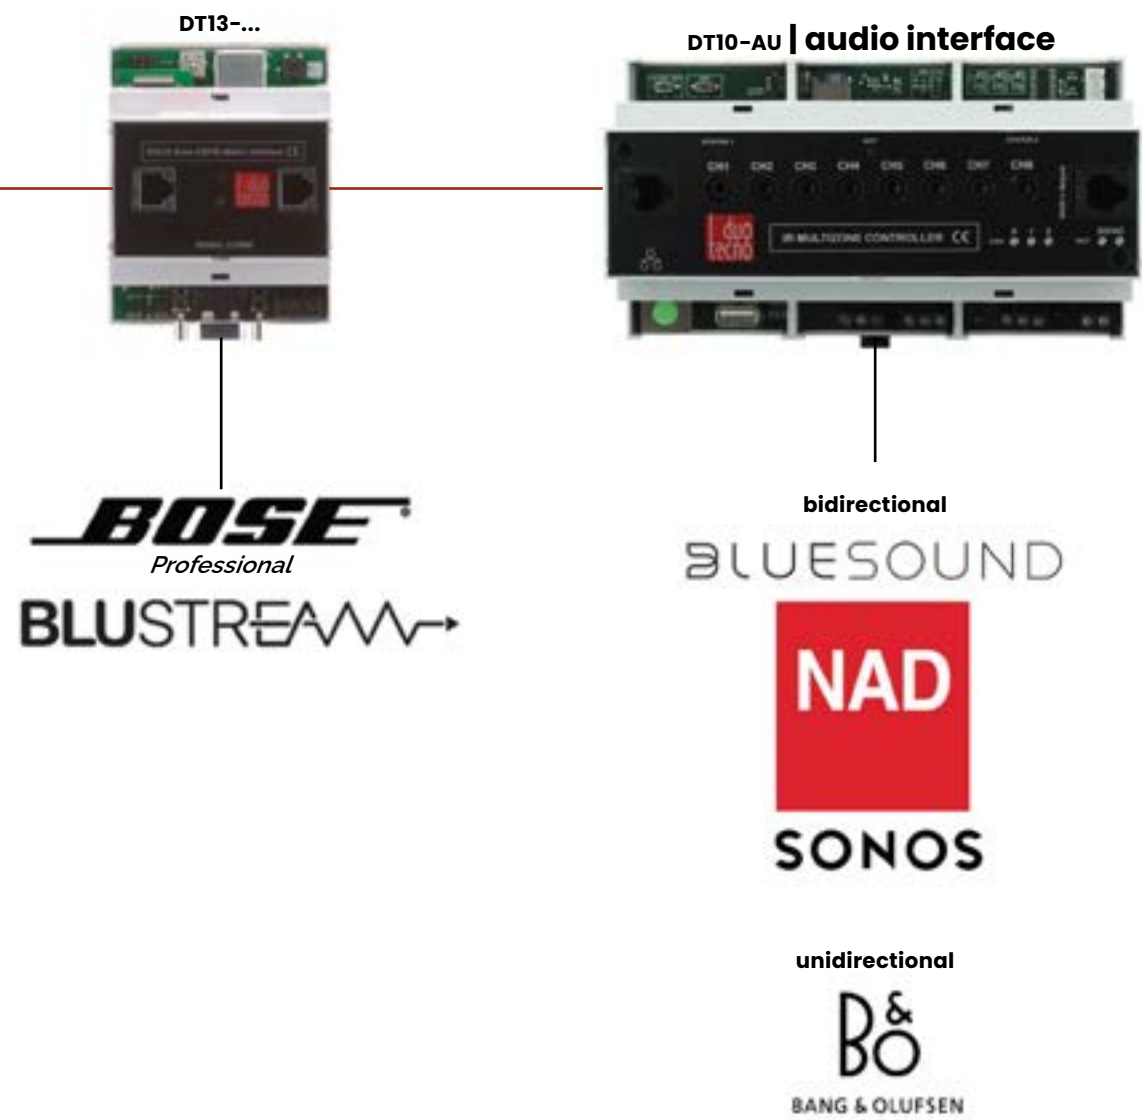

Brands such as Bose Professional, Blustream, CYP, and Avenview integrate seamlessly, allowing your sound system to connect directly to popular streaming platforms. This includes visual streaming services such as Netflix, Proximus, Telenet, Apple TV, and Voo, as well as music services like Tidal, Spotify, Deezer, Apple Music, and SoundCloud. This is just a selection of the possibilities: our offering is constantly evolving, and we are always focused on integrating new brands and optimizing existing connections. In addition to the DT13-BO, the DT10-AU offers a full-featured audio interface module. This is bidirectionally linked with brands including Bluesound, Sonos, NAD, and DALI. On top of that, we also support unidirectional connections with brands such as Integra, Marantz, RTI, Nuvo, Speakercraft, Audac, Artsound, and Bang & Olufsen...




With the Duotecno Audio Interface, you can effortlessly control multiple audio amplifiers from our product range. Control your audio exactly the way you want—via push buttons, smartphone, tablet, or a Duotecno touchscreen.

The touchscreen or app gives you an overview and control over all audio zones in your home. Easily select the desired source, adjust the volume, and see at a glance which music or input is active in each room.

Thanks to the built-in IR channels, you can also control other devices, such as TVs, radios, set-top boxes, and more. This allows audio to be seamlessly integrated into your scenes: with a single press of a button, a scene like "Watching TV" can automatically dim the lights, adjust the temperature, close the curtains, and set the correct volume and channel on your television.


The Audio Interface also supports bidirectional connections with well-known brands such as Bluesound, Sonos, and NAD, ensuring that status and control are always perfectly synchronized. For other systems, there is a unidirectional connection via HTTP commands, enabling integration with numerous external devices.

Schematic diagram | ALARM

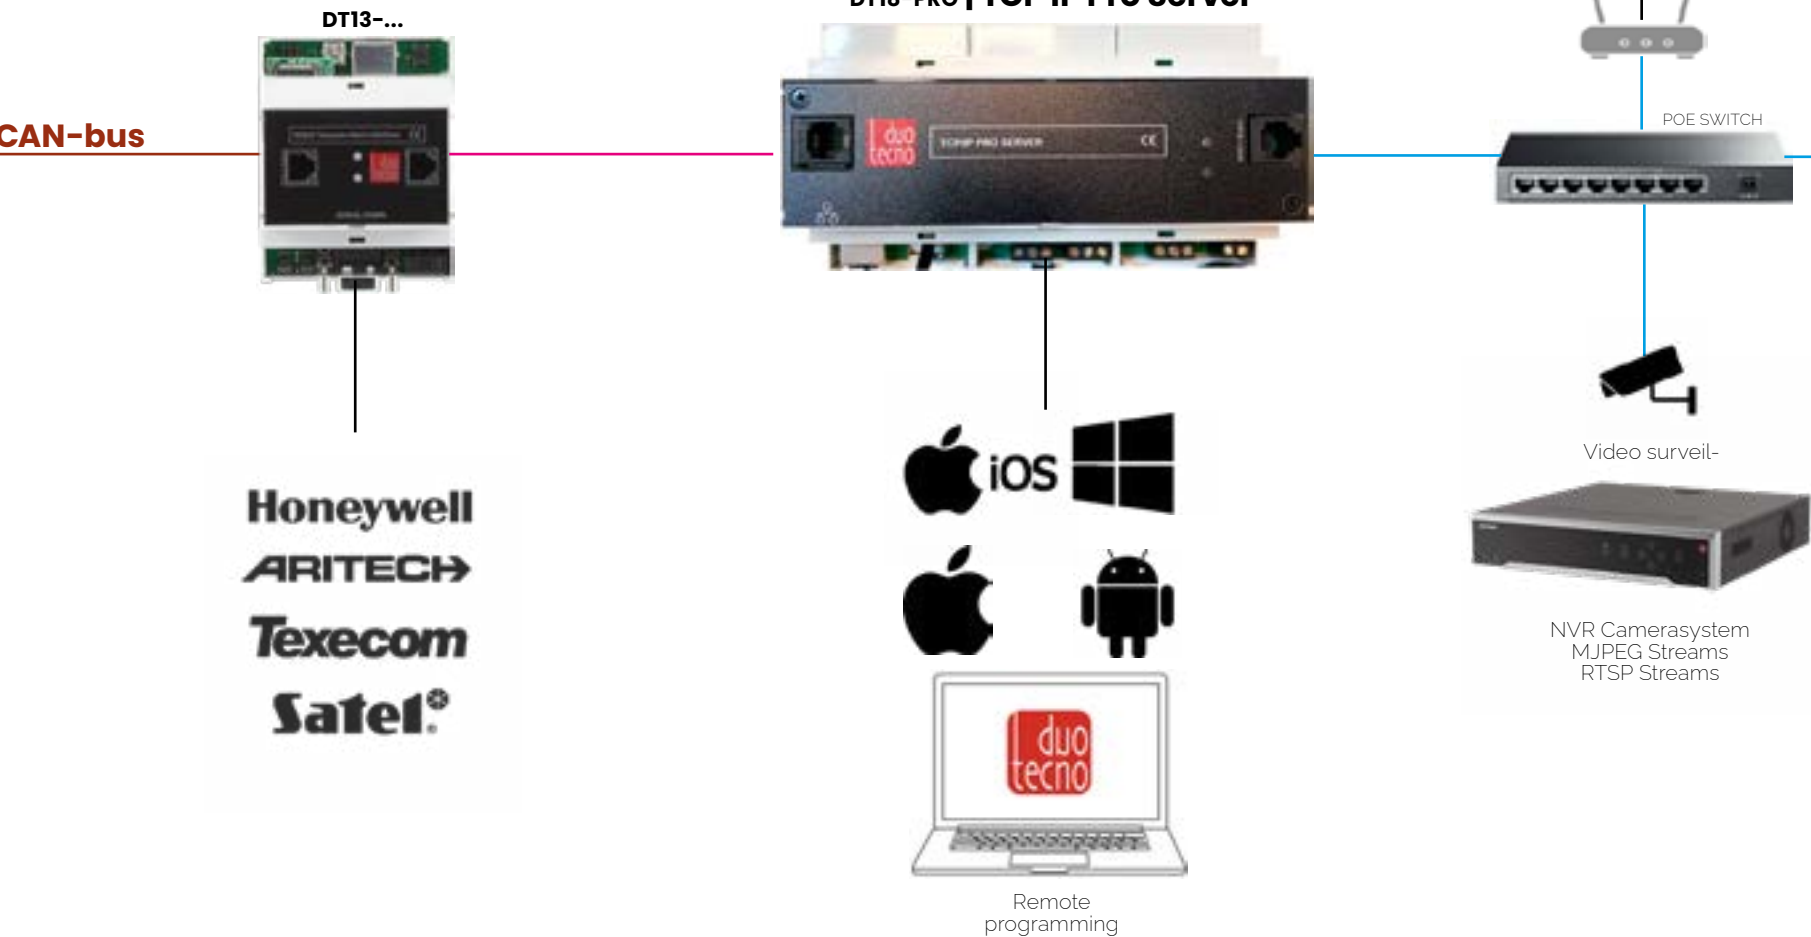

- RJ 11 Data only
- RJ 11
- FTP/UTP
- alarm cable 4 x 0.22 mm
- FTP-shielded twisted pair

Schematic diagram | VIDEOP-

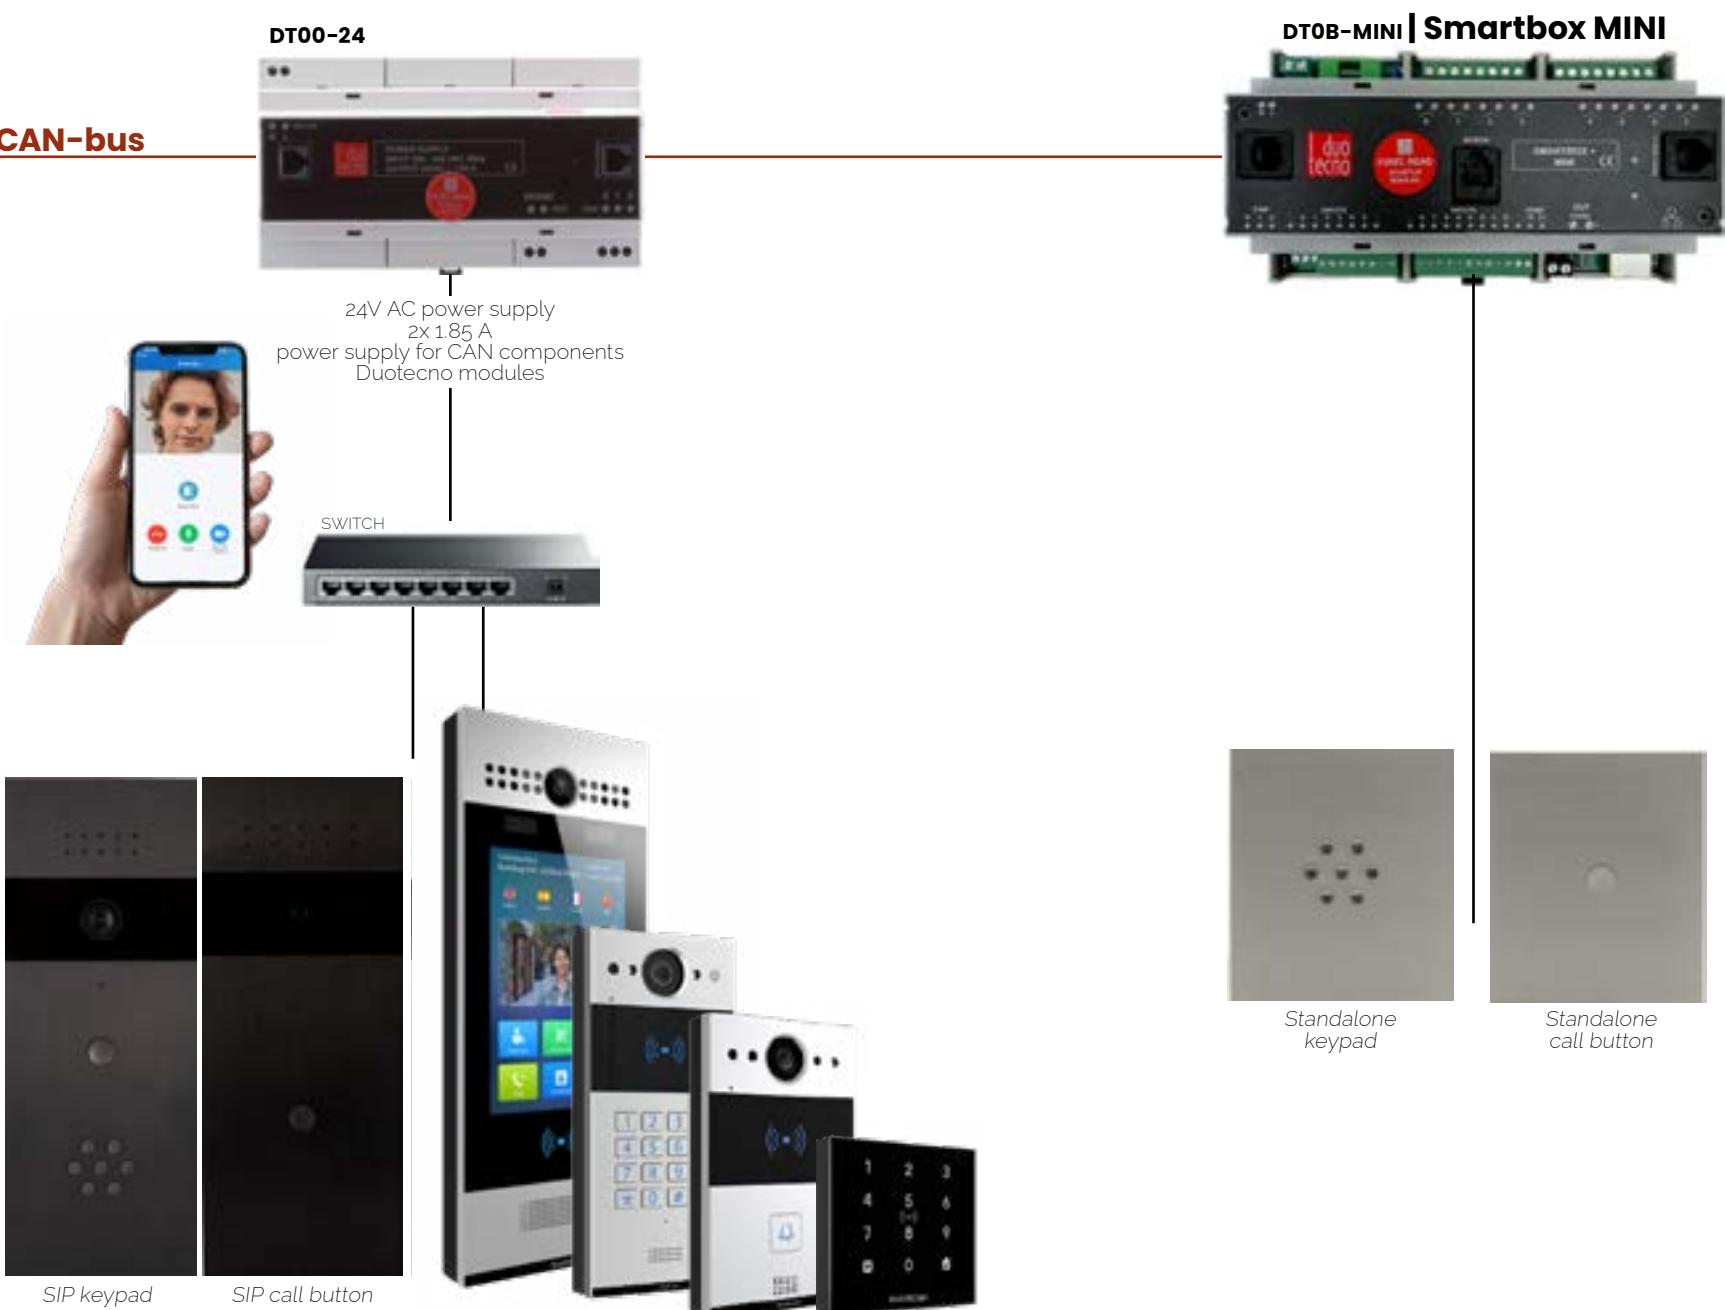



beauty
design accessories

**mechanical
switches**



Experience control in its most refined form. The Serenity switch is a modern and elegant push-button switch, designed for those who appreciate aesthetics, functionality, and tactile feel. Every detail exudes quality, from the carefully selected metal finishes—such as brass, brushed aluminum, and other luxurious materials—to the extremely precise, top-notch mechanism inside.

The Serenity is available with 1, 2, or 4 push buttons, each featuring a dual function thanks to short or long presses. The subtle click provides tangible and authentic feedback that perfectly matches the high-end character of this switch. Connected to our reliable CAN bus and fully configurable via the Duotecno Binding Software, Serenity integrates seamlessly into the Duotecno system. A paragon of Belgian innovation, designed to stimulate the senses and elevate the space.

Sophisticated, Savory, Sincere.
Serenity.

serenity



DTBS - B1Agf
DTBS - B2Agf
DTBS - B4Agf

1 fold - Forged Aluminium
2 fold - Forged Aluminium
4 fold - Forged Aluminium

velocity

The Velocity switch is more than just a functional element; it's a statement piece for those who dare to choose character. With its slightly more rugged look and elegant metal levers, Velocity brings a touch of authentic charm to any interior, without compromising on sophistication.

Available in 1-, 2-, or 4-way versions, with a dual function per lever—short and long press—the Velocity offers intuitive control tailored to your needs. The mechanical click feedback combined with the physical action of the switch levers creates a unique and tactile experience that you can both feel and hear.

Available in various luxurious metal finishes, from classic brass to modern brushed aluminum, Velocity fits perfectly into any interior. Behind the elegant front lies a top-notch mechanism, compatible with the CAN bus and easy to program via the Duotecno Binding Software. Ideal for those who want to combine functionality with a striking aesthetic accent.

Vibrant. Vested. Vigorous.
Velocity.



DTBS - H1BrL 1 fold - Brushed Bronze Light
DTBS - H2BrL 2 fold - Brushed Bronze Light
DTBS - H4BrL 4 fold - Brushed Bronze Light

Mechanical switch | LOOKBOOK



touch buttons

- | | |
|-------------|-----------------------------|
| DTBS - 4Alw | Aluminium White (varnished) |
| DTBS - 4Ag | Aluminium Grey |
| DTBS - 4Agf | Forged Aluminium Grey |
| DTBS - 4Ab | Aluminium Black |
| DTBS - 4Abf | Forged Aluminium Black |



Touch buttons | **BRONZE**



- DTBS - 4Brl Bronze Light
- DTBS - 4Brlf Forged Bronze Light
- DTBS - 4Br Bronze
- DTBS - 4Brf Forged Bronze
- DTBS - 4Gm Gun Metal





- | | |
|-------------|---------------------|
| DTBS - 4Bcr | Brushed Copper Rosé |
| DTBS - 4CrF | Forged Copper Rosé |
| DTBS - 4Bg | Brushed Gold |
| DTBS - 4Gf | Forged Gold |
| DTBS - 4Ni | Nikkel |
| DTBS - 4Nif | Forged Nikkel |







DTBS - 4WWa	Wood - Walnut
DTBS - 4WWe	Wood - Wenge
DTBS - 4Waf	Wood - Afrormosia
DTBS - 4WPa	Wood - Padouk
DTBS - 4WOPN	Wood - Oak Pura Natura
DTBS - 4WOD	Wood - Oak Dark
DTBS - 4WOCW	Wood - Oak Cotton White
DTBS - 4Was	Wood - Ash



DTBS - 4CW	Corian White
DTBS - 4CCaW	Corian Carrea White
DTBS - 4CLiW	Corian Linea White
DTBS - 4COrW	Corian Organica White
DTBS - 4CRoW	Corian Ronda White
DTBS - 4CCIW	Corian Claudia White
DTBS - 4CKW	Corian Kruis White



Touch buttons | LOOKBOOK

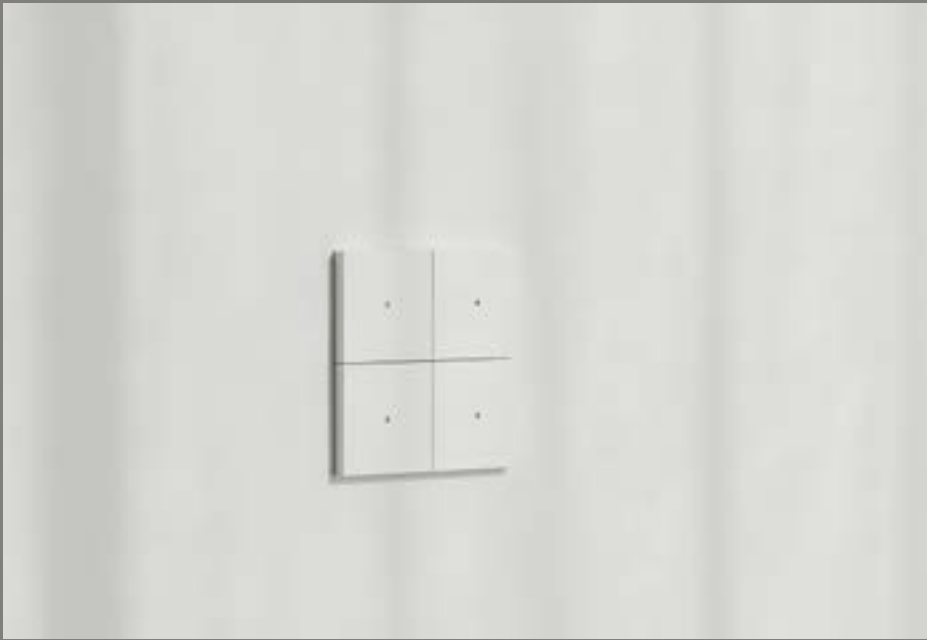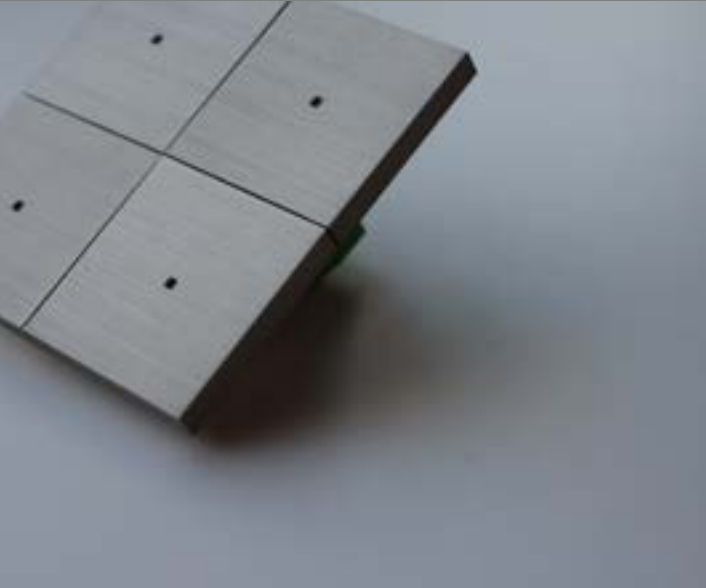



oled switches


Oled switches | ROOM-E

The two touch buttons on the left can be customized:
lighting, blinds, curtains, or a mood setting.

The Room-e is easy to use.
The display shows the functions for each button.
Ideal for public spaces.

Compact size with 6 bed functions,
featuring a sleek, streamlined design.

Available in all touch button finishes.

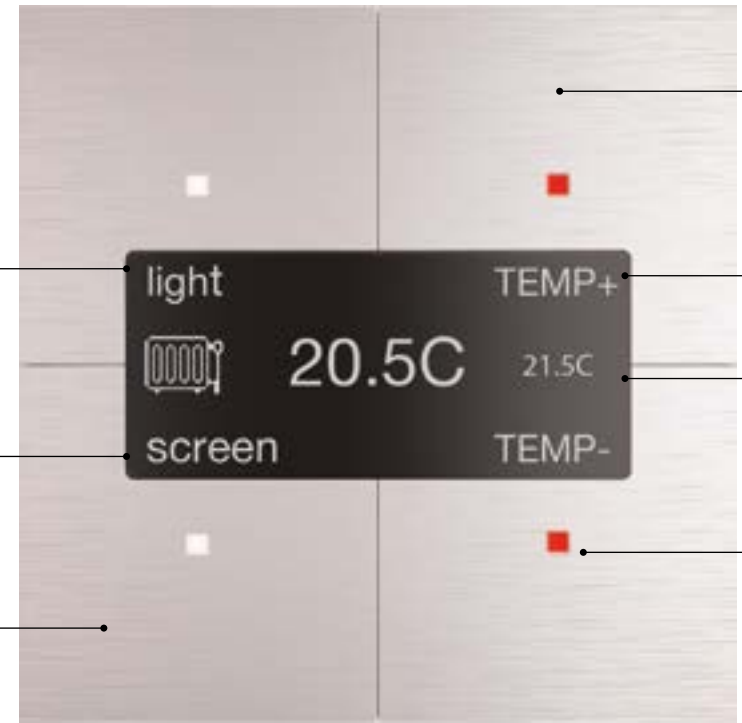

Standby mode: standard switch
with 6 functions, the two right-hand buttons of which
control the HVAC system.

Use the two touch buttons on the right to adjust the
temperature and heat or cool the room.
The status is indicated by a heating or cooling icon.



Desired temperature

Heating or cooling status
indicated by a red or blue LED.



Oled switches | **EASYTOUCH**

Standby mode: standard switch with 8 functions.
Very user-friendly basic switch.

The display shows which function each button performs.

Designed by room-e, with technology from touchbutton.

Compact design with 8 bed functions,
featuring a sleek, streamlined look.

Easy to touch, easy to use.
Available in all finishes for the touch buttons.



Oled switches | **SMART TOUCH**

Standby mode: standard switch with 8 functions.
Very user-friendly basic switch.

Desired temperature.

Time indication.

Date indication.

Compact design with 48 control functions,
featuring a sleek, minimalist look. The "swipe" function allows
you
to scroll through different screens and settings.

Available in all finishes for the touch buttons.




OLED SWITCHES | LOOKBOOK



surface-mount soc-



Surface-mount sockets |

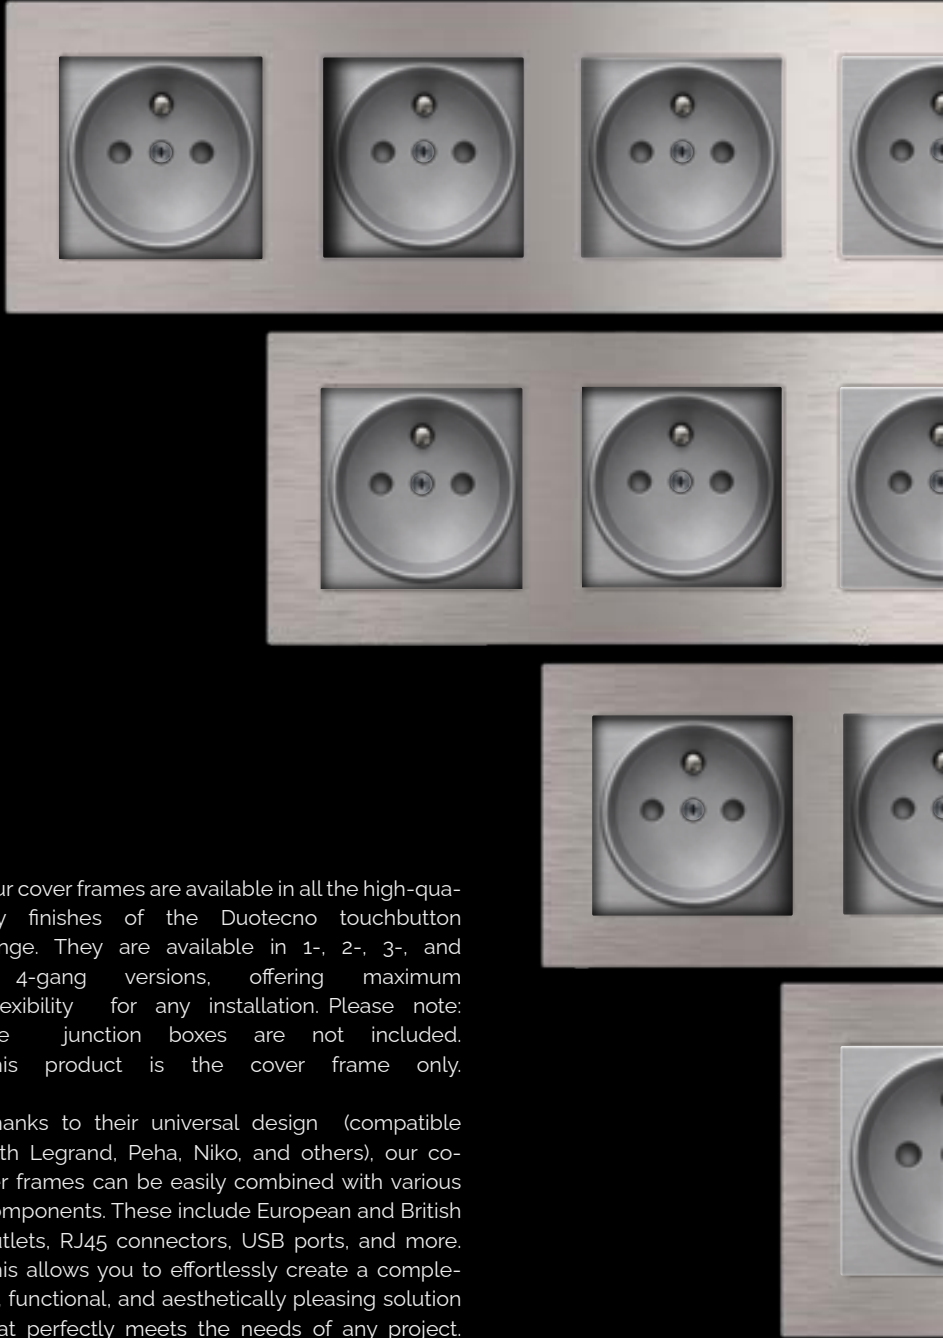

Our cover frames are available in all the high-quality finishes of the Duotecno touchbutton range. They are available in 1-, 2-, 3-, and 4-gang versions, offering maximum flexibility for any installation. Please note: the junction boxes are not included. This product is the cover frame only.

Thanks to their universal design (compatible with Legrand, Peha, Niko, and others), our cover frames can be easily combined with various components. These include European and British outlets, RJ45 connectors, USB ports, and more. This allows you to effortlessly create a complete, functional, and aesthetically pleasing solution that perfectly meets the needs of any project.




Surface-mount sockets |



SURFACE-MOUNT SOCKETS |




Switches | INSTALLATION

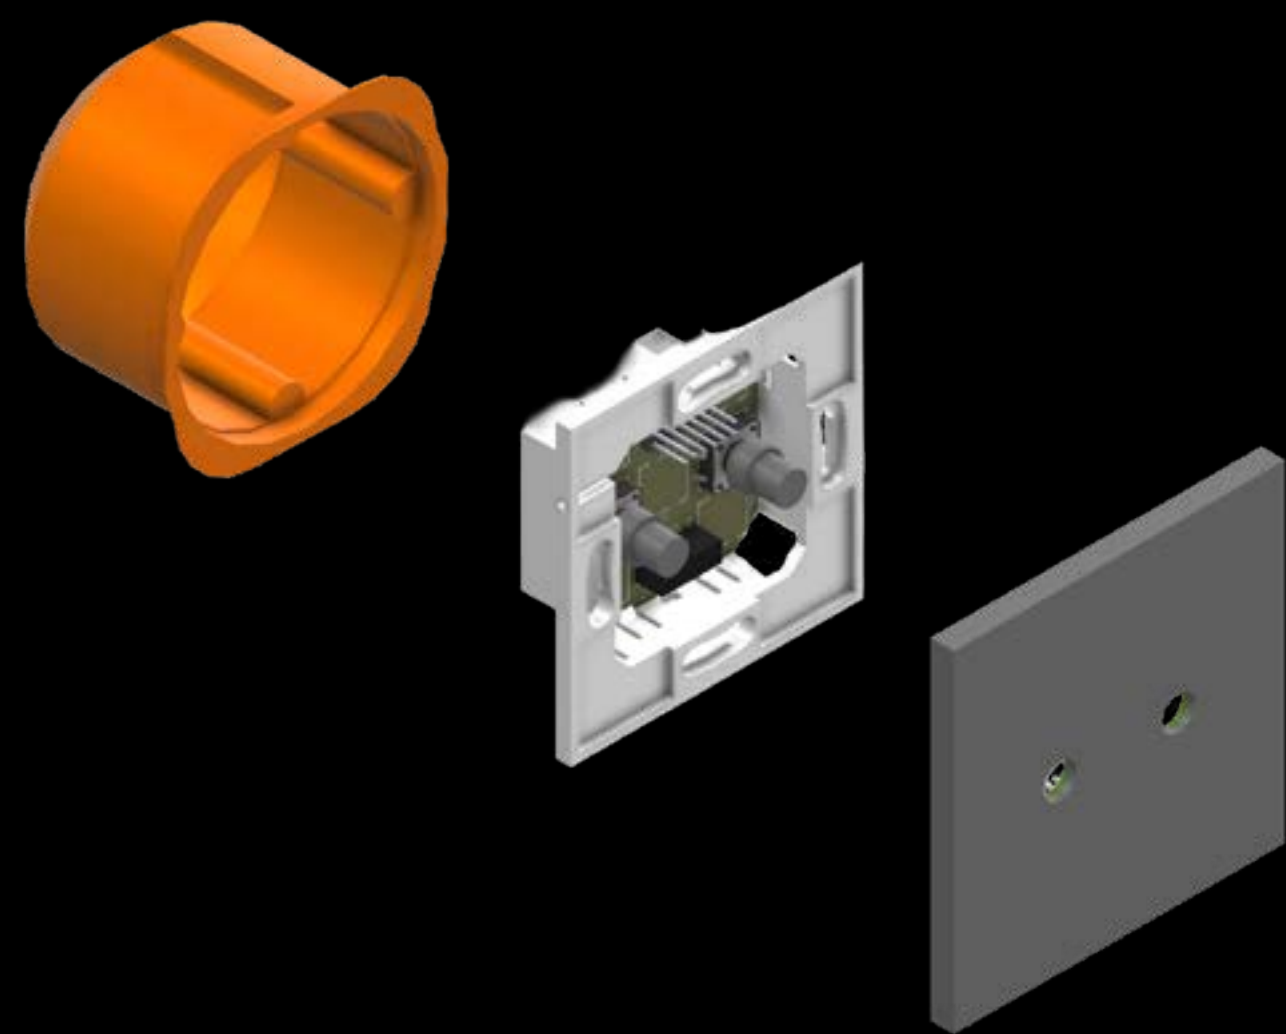

The universal flush-mount box is used for the installation of all Duotecno switches. This flush-mount box, along with its matching custom frame, can be used for any finish; the Touchbutton, Serenity, and Velocity series are all designed to fit these universal dimensions. Both the 4-gang and the OLED touch buttons can be installed in the same flush-mount box. A major advantage of this is that, after wiring, you can still choose the finish based on the wall's finish and the level of comfort you wish to achieve in the room.

Sockets | INSTALLATION

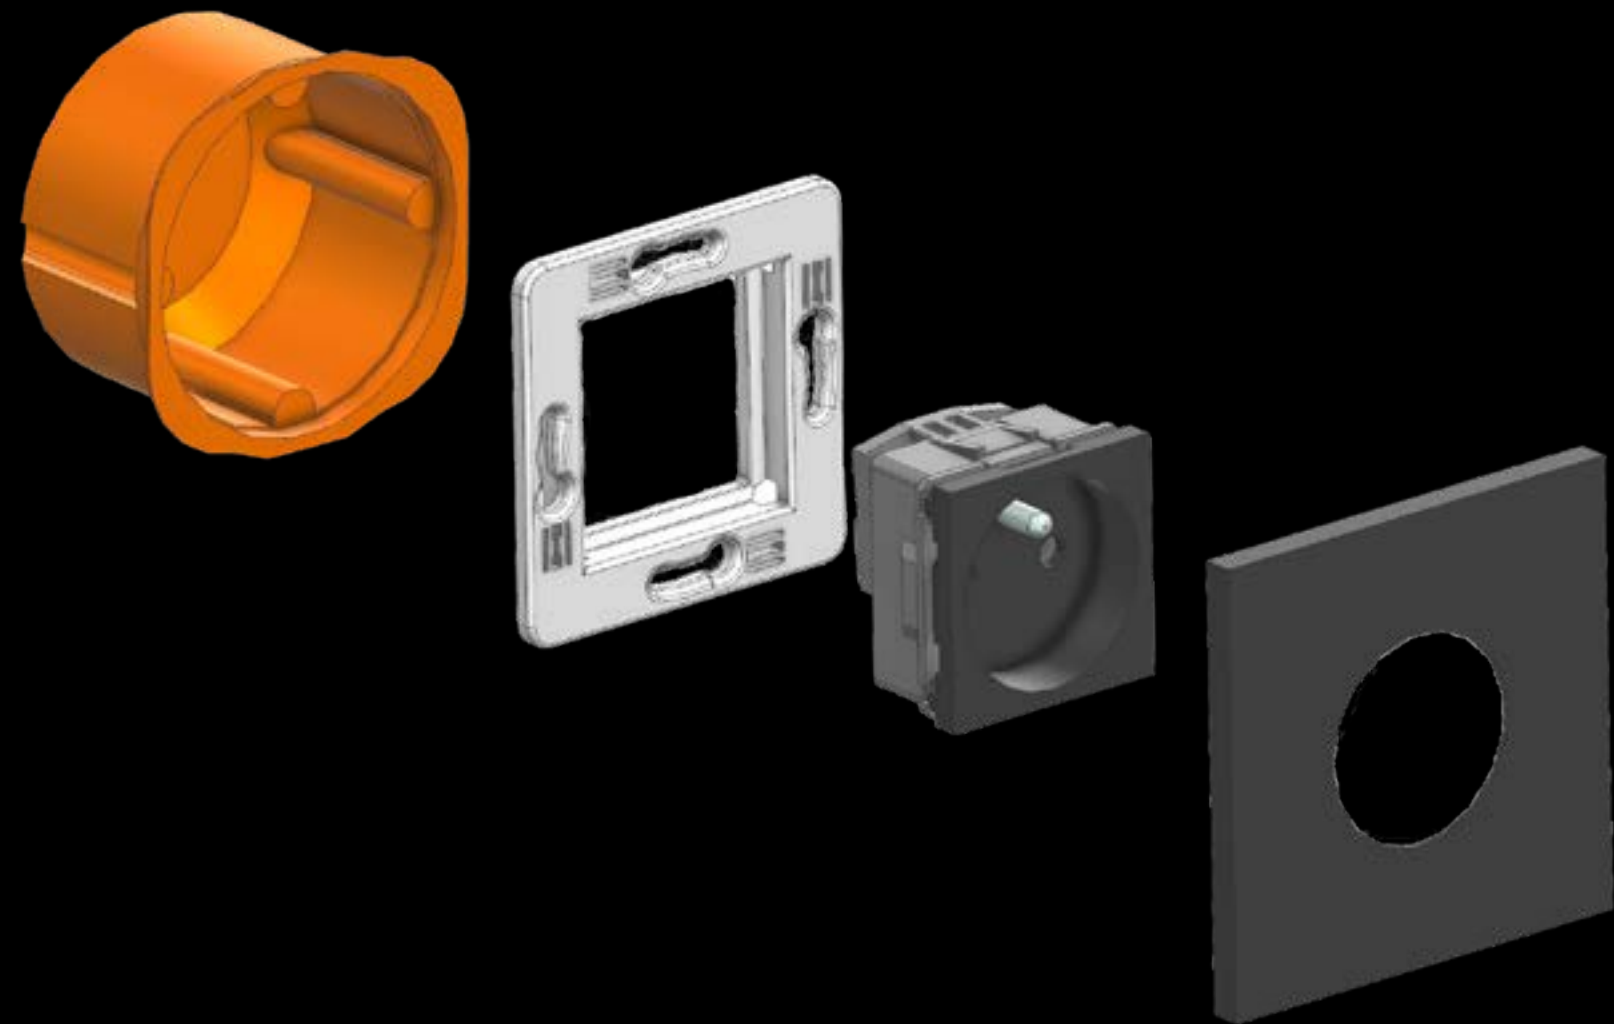


Every Duotecno socket is also based on a single universal mounting box. High-quality inserts from leading brands are installed into this base, each in the desired color and finish. Duotecno carefully coordinates every detail, creating a harmonious whole between the insert and the cover frame. Thanks to this modular principle, the final appearance can be freely determined right up until the end of the construction process, perfectly tailored to the wall finish and interior design concept. The system is available for single, double, triple, and quadruple outlets, each with a corresponding custom-made mounting frame.



integrated


Integrated | INVISIBLE

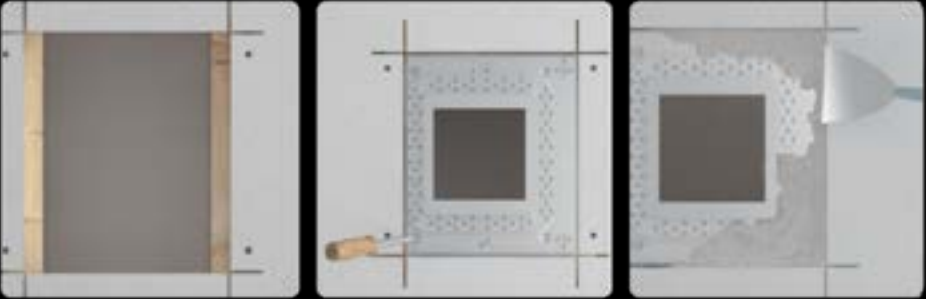

Cut out the opening.
Install two wooden planks.

Securely screw the fixture
to the wooden boards.

Apply fiberglass mesh.
Apply plaster.



Sanding machine.



Painting walls and light switches.



Finish the switch with a
matte, water-based varnish to protect it
and make it easy to clean.

The Invisible switch combines ultimate elegance with sophisticated technology. Thanks to its refined flush-mount design, you can create a fully integrated, in-wall solution that is barely visible yet offers maximum functionality.

With four touch zones and a choice of dimmable RGB LED feedback or subtle white LED feedback, the Invisible effortlessly adapts to any atmosphere. It is suitable for all surfaces from 6 mm to 12.5 mm thick—whether you choose to glue it in place or mount it using pre-drilled screw holes. The spacious mounting surface makes installation easy, and thanks to the rounded two-level structure in the Xillo fixture, plastering is also particularly straightforward.


Installation requires the trimless flush-mount box and fiberglass mesh, which allow the Invisible to guarantee its sleek, seamless finish.




paintable




wood



natural stone



natural stone




The recessed housing of our Integrated switches is made from a patented composite material developed by our subsidiary, Xillo. This unique material has the same properties as plaster, yet is stronger, more durable, and more robust.

Thanks to its finishing options—paintable or plasterable—the Integrated can be fully adapted to the style of any interior. This creates a seamless and invisible integration, without compromising on quality or ease of use.

The installation method remains identical to that of our Invisible switch, but with the added strength and versatility of Xillo technology.

Integrated | NO GAP




natural stone



wood




natural stone



natural stone




paintable



The recessed housing of our Integrated switches is made from a patented composite material developed by our subsidiary, Xillo. This unique material has the same properties as plaster, yet is stronger, more durable, and more robust.

Thanks to the finishing options—paintable or plasterable—the Integrated can be fully adapted to the style of any interior. This creates a seamless and invisible integration, without compromising on quality or ease of use.

The installation method remains identical to that of our Invisible switch, but with the added strength and versatility of Xillo technology.

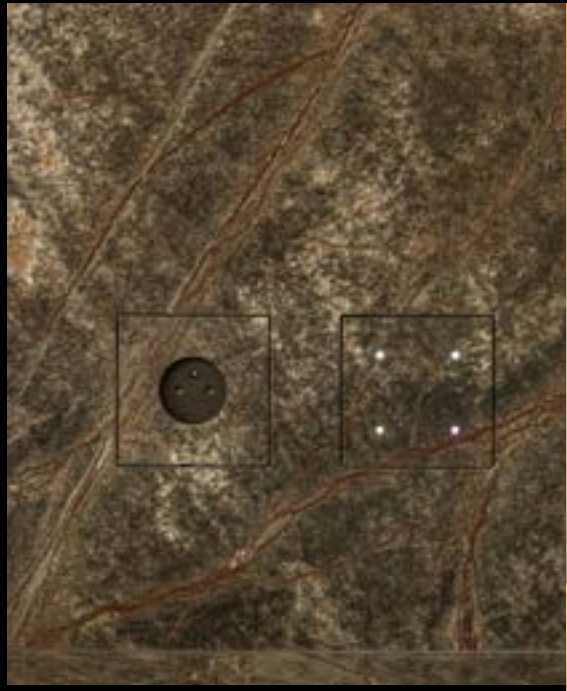



touchscreens

Touchscreen | 10 INCH



Touchscreen | 10 INCH

Fully personalized – 100% your style

Control everything from a single location

Smart scenes for every moment

- *“Turn everything off” when leaving the house*
- *“Romantic evening” with dimmed lights and soft music*
- *“Have guests over” with the door open, the heat on, and appropriate lighting*
- ...

Centralized and scalable

10 inch touchscreen



Can be installed flush with the surface



Microphone for video calling integration

Pressing briefly takes you to the atmosphere panel. Pressing and holding takes you to the interface settings.

Finishes according to the range of switches & outlets


mood panel

Back to the Home Page



Pages organized by function:

- Lighting
- Curtains, blinds & screens
- Audio: radio, music, streaming
- Cinema, television & film
- Outlets, relays
- Locks & access, alarm
- Timer & clock
- Camera integration

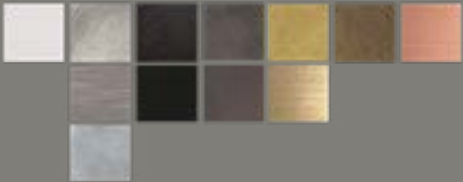

7 inch touchscreen

Product code DT0C-7x
Display 7 inch - 21.2 x 14.2 cm
Mounting box DT0C-W7

The 7-inch touchscreen offers the same user-friendly interface as its larger counterpart. Thanks to the identical layout, icons, and controls, you'll enjoy the same smooth and intuitive home control experience, but in a more compact format.

Same experience, different format.

- Just like with the 10-inch version:
- you can easily organize all your spaces using the Home button,
 - personalize the screen with your own icons and photos,
 - and activate smart scenes with the touch of a button

All features remain the same; the only difference is the screen size.

A conscious choice

The decision to choose a 7-inch touchscreen may be driven by:

- budget considerations: a more affordable alternative without compromising on functionality
- Aesthetic preference: fits more discreetly into certain interiors or smaller spaces
- Personal usage needs: ideal for secondary spaces such as bedrooms, home offices, or hallways.

Versatile

Thanks to its size, the 7-inch touchscreen is particularly well-suited as a complement to a 10-inch touchscreen in central areas, or as a standalone control unit in zones where a more compact screen is preferred. Installation of the 7-inch touchscreen is also quick and flexible. You can opt for a fully flush-mounted installation using an Xillo kit, where the screen is seamlessly integrated into the wall, or you can choose to mount it in a flush-mount box (DT0C-W7). In that case, the screen protrudes approximately 3 mm from the wall.

Touchscreen | LOOKBOOK



Detectors & sensors



Helo

Productcode	DT46-x
Colors	white or black
Application	wall or ceiling
Radius	7.4 x 3.7 m
Range	110° H, 93° V
Sensor diameter	46 mm
Drill diameter	44 mm

The Helo PIR is our newest—and most discreet—motion sensor yet, designed for those who want to combine smart technology with an invisible finish. With a diameter of just 46 mm and an extremely thin bezel, it's almost impossible to spot, while its large lens ensures reliable and accurate detection.

Compact, stylish, and seamless

Thanks to its completely flush finish, the Helo PIR integrates seamlessly into ceilings or walls. Unlike our standard Duotecno PIR, it can even be installed in areas where doors open and close without causing any obstruction. The specially designed recessed fixture ensures both durability and a perfectly smooth finish.

Smart features

- Automatic lighting turns on lights as soon motion is detected.
- Smart scenes: brings preset moods to life with a single gesture
- Energy management automatically turns off lights or systems when no one is present

Versatile applications

The Helo PIR is ideal for any space where comfort, energy efficiency, and design go hand in hand:

- Entrances, hallways, and passageways
- Bathrooms, dressing rooms, and other wet areas
- Stairwells or areas where a subtle design is desired

Fully integrated into the Duotecno home automation system, the Helo PIR responds immediately to movement and activates exactly the functions you want. This creates a home that thinks for itself, without you having to do a thing.



MOTION DETECTOR

Product code	DT40-Bx	Recessed motion detector for wall or ceiling installation.
Colors	white or black	Available in black or white.
Application	wall or ceiling	The visible housing has a diameter of just 1.8 cm.
Radius	7.4 x 3.7 m	Easy to install in drywall using the DT40-PB drywall insert from Duotecno.
Range	110° H, 93° V	
Sensor diameter	18 mm	

BUILT-IN


SURFACE

The surface-mount detector for indoor and outdoor use features a very elegant design. It has no visible lens and is weatherproof. It can be installed discreetly, thanks to its 7.3 cm diameter and 3 cm height. The 12V DC motion detector is available in black or white.

This sensor is often installed together with the Twilight Module (p. 30) in the electrical panel.

MOTION DETECTOR

Product code	DT41-x
Colors	white or black
Application	indoor or outdoor
Range	10 meters

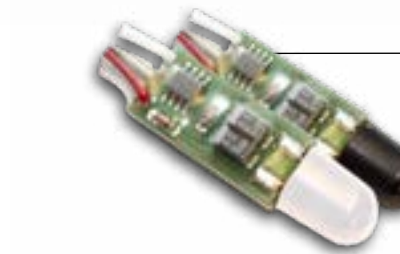

MOTION DETECTOR SMALL

Product code	DT40-Sx	Motion detector for recessed installation in small spaces.
Colors	white or black	Designed to fit into a faceplate of any brand.
Application	wall, small spaces	The visible housing has a diameter of just 1.3 cm.
Radius	2.5 x 5 m	
Range	100° H, 82° V	
Sensor diameter	13 mm	

BUILT-IN



LINE DETECTOR

Product code	DT43-x	Motion detector for recessed installation in hallways.
Colors	white or black	It has a horizontal or vertical detection range of 5 meters.
Application	hallway or staircase	The visible housing measures 2.6 cm by 1.3 cm.
Range	150° H, 35° V	
Sensor dimensions	26 x 13 mm	

BUILT-IN

BUILT-IN

The temperature sensor measures the temperature in each room. It transmits the data to the system that controls the heating or cooling. The sensors are available separately or can be built into models from various manufacturers.

There is a recess on the back of the switch for a temperature sensor, allowing it to be integrated seamlessly into the design.

TEMPERATURE SENSOR

Product code	DT30-EX
Colors	black
Application	switch



MOTION DETECTOR

Product code	DT40-LV DT40-NA	Motion detectors built into a Niko or Bticino plate.
Colors	according to external brand	
Application	wall	

BUILT-IN

Detectors | LOOKBOOK



A photograph of a modern building's exterior. The entrance features a dark, vertically-slatted door and a large glass window to its right. The building is constructed with light-colored, textured blocks. The foreground shows a concrete walkway, gravel, and some greenery. The text 'video intercom & access control' is overlaid in large white letters on the right side of the image.

video intercom & access control



VIDEOPHONY | push button

Product Code	DT20-0DS
Colors	Aluminum gray, aluminum black & bronze
Application	IP design video intercom
Features	push button (doorbell), camera & audio
Dimensions	305 x 120 x 6 mm
Mounting Box	

This elegant, designer outdoor unit features an integrated call button on the front panel for access control. With a camera and integrated microphone, it allows you to communicate with the visitor . This video intercom system is typically integrated with a touch-creeen and app.



VIDEOPHONY | keypad

Product Code	DT20-CDS
Colors	Aluminum gray, aluminum black & bronze
Application	IP video door phone
Features	Push button (doorbell), camera, audio & keypad
Dimensions	305 x 120 x 6 mm
Mounting Box	

This elegant, designer-style outdoor unit features an integrated doorbell button on the front panel for access control. The camera and built-in microphone allow you to communicate with visitors. Additional security via a keypad. Access is possible using various code combinations. This video intercom system is typically integrated with a touchscreen and app.



ACCESS CONTROL | push button

Product Code	DT20-SAPB
Colors	Aluminum gray, aluminum black & bronze
Application	Standalone call button
Features	push button (call)
Dimensions	140 x 120 x 5 mm
Mounting Box	DT21-BW

This elegant, designer-style outdoor unit features an integrated doorbell button on the front panel for access control.



ACCES CONTROL | keypad

Product Code	DT20-CSA
Colors	Aluminum gray, aluminum black & bronze
Application	Stand-alone keypad
Features	keypad (code)
Dimensions	140 x 120 x 5 mm
Mounting Box	DT21-BW

This elegant, designer-style outdoor unit features an integrated keypad in the front panel for access control. Access is granted via various code combinations.



ACCESS CONTROL | combi

Product Code	DT20-CSAPB
Colors	various metal finishes
Application	Stand-alone keypad
Features	push button (bell), keypad (code)
Dimensions	140 x 120 x 5 mm
Mounting Box	DT21-BW

This elegant, designer-style outdoor unit features an integrated doorbell button and keypad on the front panel for access control. Access is granted via various code combinations.

VIDEOPHONY | code keyboard

This elegant, designer outdoor unit features an integrated call button on the front panel for access control. With a camera and built-in microphone, it allows you to communicate with visitors. It is typically integrated with a touchscreen and app.

Product Code	DT20-CK
Colors	black or silver
Application	IP video intercom
Features	doorbell, keypad, camera & audio
Dimensions	185 x 85 x 29 mm
Mounting Box	DT20-WK



VIDEOPHONY | push button & badge reader

This outpost features a call button on the front panel for access control. The camera and built-in microphone allow you to communicate with visitors. The badge reader makes it easy to grant access to authorized individuals.

Product Code	DT20-AK1
Colors	black or silver
Application	IP video intercom
Features	push button (doorbell), camera, audio, badge reader
Dimensions	145 x 85 x 27.5 mm (surface-mounted)
Mounting Box	DT20-WK1



VIDEOPHONY | code keyboard



Product Code	DT20-X
Colors	black
Application	IP video intercom
Features	push button (doorbell), camera, audio & keypad
Dimensions	234 x 94.5 x 34 mm
Mounting Box	DT20-WX

This surface-mounted entry unit offers various access control options: doorbell button, integrated screen, camera, speaker, keypad, and badge reader. The screen can be used to select a specific person, room, or apartment. With the badge reader (RFID tag) and keypad, access can easily be granted to authorized individuals.

ACCESS CONTROL | keypad

This standalone keypad uses a keypad for access control. With its built-in badge reader, access can also be easily granted to authorized individuals.

Product Code	DT20-CIP
Colors	black
Application	access control
Features	keypad and badge reader
Dimensions	86 x 86 x 33 mm



Videophony | 7 INCH



Videophony | 7 INCH

The 7-inch video intercom combines modern design with advanced technology to provide a secure and user-friendly access solution. The sharp 7-inch capacitive touch LCD screen offers vivid colors and excellent image quality, ensuring that conversations with visitors or viewing camera footage are always clear and crisp.

With this system, you can choose from multiple advanced access methods. Facial recognition identifies authorized individuals in less than half a second, with an accuracy of over 99.9%. Additionally, the unit features a PIN code keypad and a badge reader for RFID and NFC, so everyone can enter in the way that best suits them.

Thanks to the capacitive touch controls, interaction is fast and intuitive, while the elegant design fits perfectly with any exterior, from modern to classic. The outdoor stations feature a stylish anodized aluminum finish, ensuring a high-quality look and durability.

With the integrated camera functions, you always know what's happening around your home. View live footage via the touchscreen or directly on your smartphone. You can answer or decline incoming calls as desired, and missed calls are easy to re-view. When someone rings the doorbell, a pop-up with the camera view automatically appears on the touchscreen, allowing you to start the conversation immediately.

Thanks to the SIP connection, each outdoor station can be linked to a touchscreen, IP phone, or mobile app. When you're away, the door station automatically switches to your smartphone, so you can speak with visitors remotely. When combined with a video surveillance system, the system can take up to four photos of the visitor while you're away and send them via email or message to your PC or smartphone.

By integrating videophony into your Duotecno home automation system, you create even more functionality and ease of use, fully tailored to your needs. Whether it's a villa, an apartment complex, or an office environment, videophony offers maximum security, flexibility, and ease of use in one stylish package.

7 inch videophony

Product code	DT20-TDS
Display	7 inches
Finishes	silver or black
Mounting box	DT20-WTD



In combination with an indoor unit
7- or 10-inch touchscreen (DT0C-7x or DT0C-10x)





**audio &
home theater**

DESIGN SPEAKER | Alto

Product code	DT-ALTO
Colors	black or white
Application	designer interior speaker
Dimensions	130 x 55 x 62.5 mm

A designer speaker that blends seamlessly into any interior. It integrates with the lighting. The speaker is always installed in combination with a subwoofer for the ultimate listening experience.



Xillo is Duotecno's innovative subsidiary that specializes in sleek and seamless built-in solutions. With our unique built-in fixtures, we make it possible to install any interior element—such as switches, speakers, lighting, outlets, ventilation grilles, and smoke and alarm detectors—completely flush and edge-free into walls or ceilings. No visible edges. No distracting transitions. Just pure finishing perfection.

The strength of Xillo lies in its patented composite material, developed to have exactly the same properties as plaster. The material is stronger, more robust, and fully customizable to the customer's preferences—painted or plastered—allowing it to integrate effortlessly into any type of interior. The fixture thus forms the perfect bridge between design and functionality.

Our solutions are not only visually superior but also thoughtfully designed for installation. Each element features pre-drilled screw holes, multiple installation levels, and convenient laser positioning indicators. This allows installers to work quickly, precisely, and efficiently, in close collaboration with tradespeople such as painters and plasterers.

Xillo is the standard for a uniform, high-end finish. The result? An architectural finish so refined and invisible that it almost seems like magic.



XILLO
INNOVATIVE RECESSED SOLUTIONS

Behind every Xillo recessed lighting solution lies years of expertise, refined craftsmanship, and a relentless focus on quality. What began as a technical concept has evolved, thanks to continuous R&D and practical improvements, into a comprehensive solution that perfectly combines aesthetics and functionality. In our workshop in Bruges, we manufacture every built-in fixture entirely in-house, with an eye for detail and respect for craftsmanship. Our close collaboration with installers, painters, and plasterers ensures that our solutions are not only innovative but also tailored to the realities of the job site.

Every product bears the hallmark of authentic Belgian craftsmanship and is developed in an environment where craftsmanship and technology go hand in hand. Because for us, invisible integration is only truly successful if the craftsmanship behind it remains palpable.



SMOKE DETECTOR | Fumo

Product code	X_BOSCH_FCP500
Colors	white
Application	compatible with the Bosch FCP500 smoke de-
Dimensions	tector



Stylish smoke detector that blends seamlessly into a wall or ceiling. Thanks to its flawless finish, this detector blends perfectly into any interior without compromising on performance or reliability.



ALARM DETECTOR | Viso

Product code	V_PDM_I12_F
Colors	white
Application	compatible with Vanderbilt PMD-IXD12
Dimensions	57 x 127.5 mm

An alarm detector that blends seamlessly into the interior. Integrated with the lighting. The speaker is always installed in combination with a subwoofer for the ultimate experience.

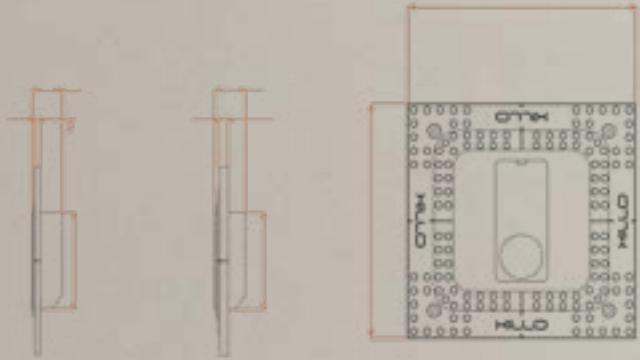



VENTILATIE | Fento Tondo

Product code	CFI100BC or CFI125BC
Colors	depending on finish
Application	brick concrete width: 100 mm or 125 mm
Diameter	200 mm
Product code	CFI100PB or CFI125PB
Colors	depending on finish
Application	plasterboard width: 100 mm or 125 mm
Diameter	200 mm


VENTILATIE | Fento Piazza

Product code	SFI100BC or SFI125BC
Colors	depending on finish
Application	brick concrete width: 100 mm or 125 mm
Diameter	200 mm
Product code	SFI100PB or SFI125PB
Colors	depending on finish
Application	plasterboard width: 100 mm or 125 mm
Diameter	200 mm



PLUMBING | Unseen


Product code	UI200X
Colors	depending on finish
Application	plasterboard Geberit Omega/Sigma
Dimensions	232.6 x 150.6 mm
Product code	UI200S
Colors	depending on finish
Application	natural stone Geberit Omega/Sigma
Dimensions	235.6 x 152.1 mm

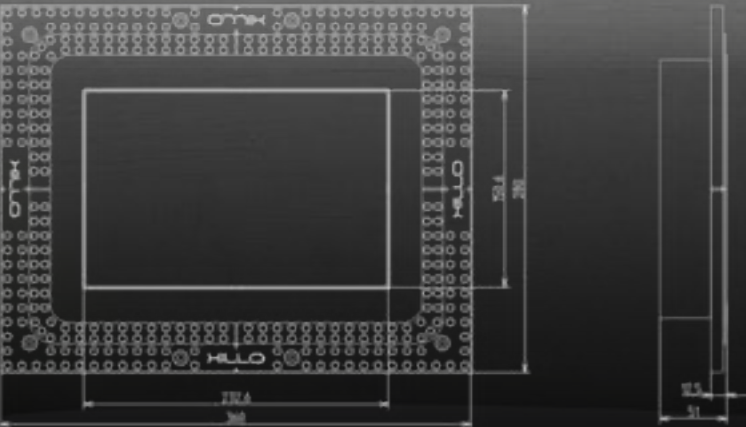

Xillo | LIGHTING



Xillo | AUDIO

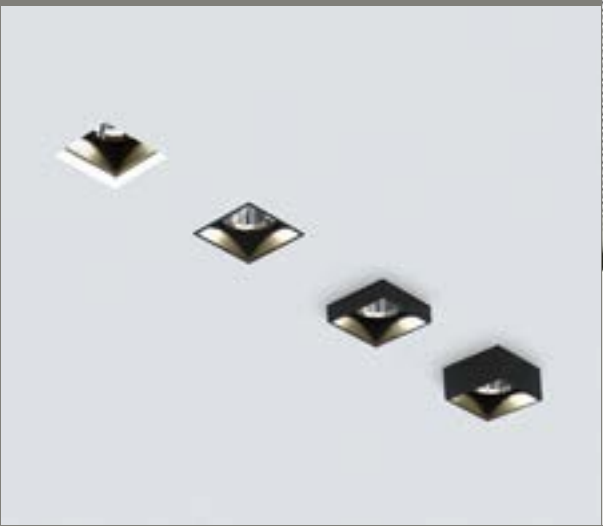

References | RESIDENTIAL



ARCHITECTS

3 Architecten
Adins-Van Looveren Architecten
AIT-architecten
Archideux
Architect Anje Dhondt
Architect Bill Cosman
Architect Charlotte Boucquez
Architect Christophe Baetens
Architect Corbiau
Architect De Deurwaerder B&H
Architect Dieter Vander Velpen
Architect François Vandamme
Architect Glenn Reynaert
Architect Kris Rymenants
Architect Luc Debeir
Architect Luc Toelen
Architect Marc Merckx
Architect Patrick Six
Architect Parallel
Architect Peter Bovijn
Architect Stephane Boens
Architect Vincent Van Duysen
Architect Xavier Donck
Architectenbureau Bart François
Architectenbureau Berkein
Architectenbureau Claerhout-Vanbiervliet
Architectenbureau De Beir
Architectenbureau Dries Bonamie
Architectuuratelier Steven Dejaeghere
Atelier S&T
Bernard De Clerck Architects
Bourgonisch Kruis
Bouw ID
Bureau d'architecture ABplus
Buro II & Archi + I
CAAN architecten
Carson
CAS Architecten
Crepain Binst Architecture
Daskal-Laperre
DDM Architectuur
Devaere NV
Eric Kuster
Fugazzi
GC-Architecten
Glenn Reynaert

Goddeeris Architecten
Goedefroo Architecten
Govaert & Vanhoutte
Godefroid Jan
Hans-Christian Demyttenaere
H&B Architects
IA architecten
Ingericht!
Interieurarchitect Benedicte Lecot
Interieurarchitect Britt Thomas
Interieurarchitect Daskal Laperre
Interieurarchitect Dennis T'jampens
Interieurarchitect Frederik Mahieur
Interieurarchitect Gerd Couckhuyt
Interieurarchitect Isabelle Onraet
Interieurarchitect Janpieter Verstraeten
interieurarchitect Lieven Musschoot
Interieurarchitect TJIP
Interieurarchitecte Laura Calleeuw
Interieurarchitecte Natascha Persoone
KIMM Architectuur
Ligne Recta
Line Architects
Loft 4C (Filip Deslee)
Luum
Magnus Villabouw
MBG
Mathieu Verhoeven
Merijn Degraeve
Miranda De Boeck
NORM Architecten
Oystr Studio
Projectarchitect
RV Architects
Salens Architects
Scratch Studio
SD Concepts - Didier François
Sheci
Stephane Boens
ROBI Interior
Steven Thermote
The Creative Company
UAU Collectiv
Van Raemdonck design
Vandamme - Vandeputte Architects

References | PROJECT DEVELOPMENT



PROJECT DEVELOPERS

- Acasa
- Aedimar Real Estate
- Alychlo
- Antonissen Development Group
- Ardea
- Baltisse
- Bauhaus Projects
- Bouw Devaere NV
- B&R Bouwgroep
- Caenen
- Christiaens Projects
- Chrisma
- Condius
- Cores
- Costermans Projecten
- Dumobil
- Eaglestone
- EL-Contractors
- Eribo
- Furnibo
- Global Estate Group
- Goethals Promotor
- Groep Versluys
- Group Deneve
- Hercull
- Hoprom
- ION Development
- Koramic Real Estate
- Magnus Villabouw
- Neo Projects
- POC Real Estate
- Rietveld projects
- Sels Villabouw
- Steenoven
- Urbicoon
- VDD Project Development
- Villa Interno
- Vlassak-Verhulst
- VT-Invest
- WeDevelop




 Duo technie bvba
 Ten Daele, TS 1 - 3200 Brugge
 T: +32(0)50 20 05 61
 info@duotechnie.be - www.duotechnie.be

 10" TC
 7" TC


Touchbutton met temperatuur
 Touchbutton
 Velocity (hendel)
 Serenity (button)

RoomE
 Smart touch

Lamellen horizontaal
 Lamellen verticaal
 Schuifgordijn
 Rolgordijn
 Zonnecover
 Zonnecover

duo tecno		Verlichting		Dali/Dmx		Stopcontact		Touchbuttons, Hendels, Buttons		Bewegingsdetecoren		Tempera tuur		open toe		7" 10" Spr aak		Buitenpost		Audio / Video																						
																																										
Offertenummer: 22000 24/10/2023	Aan/Uit	Dimmer fase aansnijding	LED Dimmer fase afsnijding	LED PWM dimmer	LED dimmer 0-1/10 v met shutoff	LED dimmer 0-1/10 v	Dali sturing	Dmx sturing	Dmx pwm sturing	Aan/Uit	Dimmer fase aansnijding	Diverse, terrasverwarming, puls	Diverse drukknop (Niko, Bicino...)	1 kanaal	2 kanalen	4 kanalen	Smarttouch	Room E	Easytouch	plafonddetector PIR inbouw	Plafonddetector PIR voor buiten	Bewegingdetector lijn op 1,5m	Office sensor	Alarm sensor	Temperatuursensor inbouw	Koeling	Op/neer	Op/neer DC	TFT aanraakscherm 7"	TFT Touchscreen 10"	TFT spraak voip/sip	Buitenpost voip/sip	Buitenpost voip/sip met codeklavier	Buitenpost voip/sip met biometrie	Schemerschakelaar	Audio Bluesound Dolbi	Audio Bluesound Inbouw Speaker	Audio Bluesound Opbouw Speaker	Audio Bluesound Duotecno Speaker met bas	TV oled	Projectie	
Ruimtes																																										
Inkom	1					2																																				
Technische berging	1										1									1																						
Toilet 1	1						1													1																						
Bureau						4																																				
Zitruimte						6																		1																		
Eetruimte			1			4					1																															
Keuken						5																							1			1										
Keukenberging	1																																									
Linnenkamer	1																			1				1																		
Dressing						2					1									1				1																		
Slaapkamer 1						4					1									1			1																			
Badkamer 1	1					4					1									1			1																			
Slaapkamer 2						2							3							1			1																			
Badkamer 2	1					2																																				

Experience center & showroom Brugge | Ten Briele 18.1 – 8200 St. Michiels Brugge

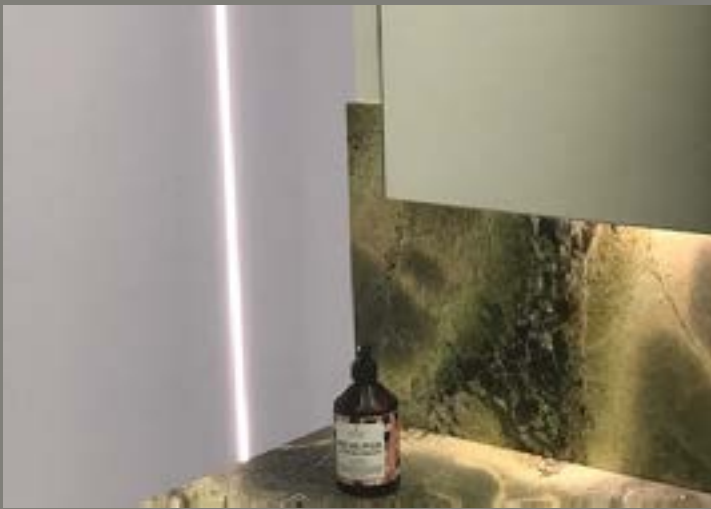

Showrooms



Showroom Antwerp
Bredabaan 575
2170 Antwerp



Showroom E-17
Prijkelstraat 3
9810 Nazareth - De Pinte



Showroom By Winwats - Casablanca
66 Hay El Fath 3 rue n4 ain chock
20480 Casablanca - Maroc





Notes:

