

# TECHNICAL DATA SHEET

## TRIMLESS BOX GS 90 x 90




### Technical specs

Fitting	suitable for one 4F switch, 4F room controller or wall
Touchbutton	detector
Material	Glass or Stone
Finish	patented composite, paintable
Opening	natural white, paintable
Cut out	GS: 91 x 91 mm
	plasterboard (PB): 182 x 204 mm
Total depth	concrete (BC): Ø 110 mm
	plasterboard (PB): 54,5 mm
	concrete (BC): 61 mm


### Order Codes

TRIMSWITCH GS PB	housing for plasterboard GS, 4F
TRIMSWITCH GS BC	housing for concrete ceiling GS, 4F

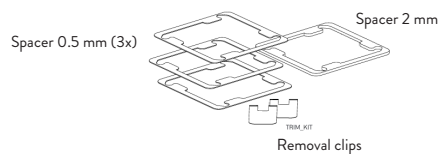

**NOTE:**  
Use the spacers to level the built-in products with the wall **AFTER** painting the wall  
**DO NOT THROW AWAY THE SPACERS**


### Dimensions

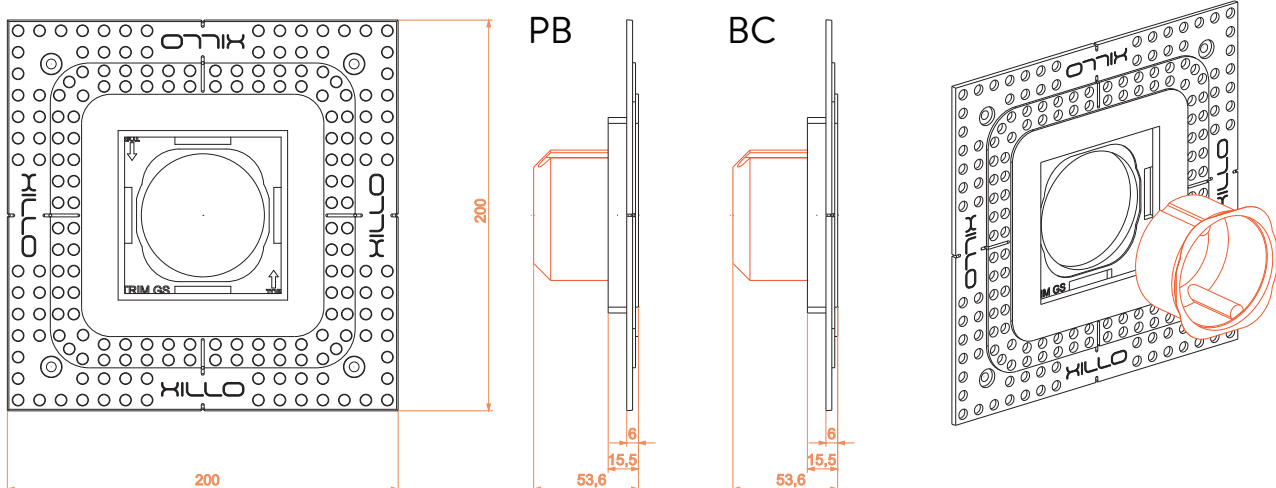

# TECHNICAL DATA SHEET

## TRIMLESS BOX GS 90 x 90

### Construction

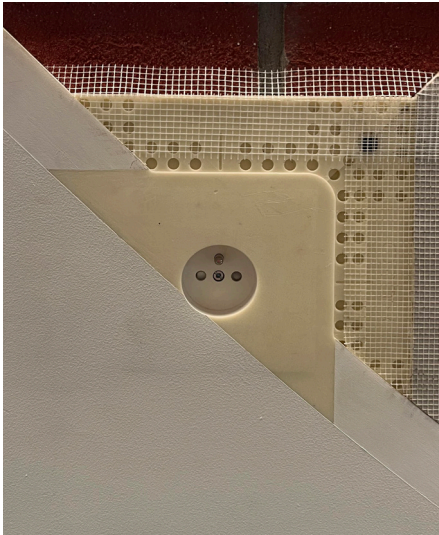

**NOTE:**

Ensure a drywall mesh is placed over all the sides of the Xillo plate

The working temperature must always remain between 7 °C and 45 °C; at lower or higher temperatures, excessive expansion may occur, which can cause the plasterwork to crack

Image for illustration purposes only – actual product may vary, construction is similar.



**NOTE:**

For clearer and more detailed instructions, please refer to the instructional video.

